Bruhat Bangalore Mahanagara Palike
Executive Engineer Yelahanka Division

Name of Work: Improvements to Roads and Drains and other developmental works in Attur Ward No-03 Under Road Development head in Chief Minister Navanagaraothana of Yelahanka Division (Package -02)

Sl No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
1	KSRRB 200-8 Clearing and grubbing road land including uprooting rank vegetation grass bushes shrubs and trees of girth upto 300mm by manual means in area of lights jungles removal of stumps disposal of unservicable materials stacking of servicable materials labour charges complete as per specification								
	Anurag Flat No-33-48 S-HIG-C-3	Sqm		30.00	4.30		129.00		
	Yamuna S-HIG-A8			28.00	5.30		148.40		
	Kapila Block S-HIG-B3 Right side			18.90	4.10		77.49		
	Kapila Block S-HIG-B3 Back side			30.00	5.90		177.00		
	Swasthik S-HIG-C Right Side			12.00	5.70		68.40		
	Swasthik S-HIG-C Front Side			23.60	7.20		169.92		
	Square Yards S-HIG-01 Front Side			32.30	6.80		219.64		
	Square Yards S-HIG-01 Front Side			25.40	8.80		223.52		
							1213.37	**11.13**	**13504.81**
	Approved rate	**11.13**							
2	KSRRB 300-49 scarifying bituminous course 50mm to 75mm thick along with premix carpet I surface dressing by manual means without disturbing the base and stacking of the debris materials including cost of all labours charges complete as per specification MORTH I Chapter 3								
	Ams Extension	Sqm							
	3rd Main Road		1	205.00	4.50		922.50		
	4th A Main road		1	160.00	4.50		720.00		
	4th Main Road		1	162.00	4.50		729.00		
	7th A Cross Road		1	101.00	5.00		505.00		
	5th A Main Road		1	153.00	2.00		306.00		
	6th A Main Road		1	144.00	2.00		288.00		
	oriental school road		1	216.50	6.00		1299.00		
	1st main AMS Extension		1	180.00	2.00		360.00		
	opposite to regancy school gate 2		1	96.00	5.00		480.00		
	Beside Arohana Stationary		1	100.00	3.50		350.00		
	Main Road 3rd		1	333.00	4.00		1332.00		
	Ams Layout								
	4th B Main Road		1	156.00	4.00		624.00		
	4th A Main Road		1	162.00	4.00		648.00		
	4th C Main Road		1	310.00	4.50		1395.00		
	3rd Main Road		1	238.00	8.00		1904.00		
	1st Cross Road AMS Extension		1	33.40	4.50		150.30		
	2nd Cross Road AMS Extension		1	82.00	4.00		328.00		
	3rd Cross Road AMS Extension		1	82.20	4.50		369.90		
	2nd Main Road		1	200.00	4.50		900.00		
	3rd Cross Road		1	340.00	4.50		1530.00		
	2nd Cross Road		1	242.00	4.50		1089.00		
	1st Cross Road		1	240.00	4.50		1080.00		
	4th Cross Road		1	280.00	4.00		1120.00		
	5th Cross Road		1	290.00	6.00		1740.00		
	6th Cross Road		1	103.50	6.50		672.75		
	7th Cross Road		1	57.00	6.00		342.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	7th Main Road		1	300.00	4.50		1350.00		
	1st 'A' Main Road AMS Layout		1	56.40	2.50		141.00		
	1st Main Road AMS Layout		1	150.00	2.50		375.00		
	Cross Road-3		1	150.00	2.00		300.00		
	Cross Road 1		1	50.00	2.50		125.00		
	Swagat Layout								
	5th Cross Road		1	230.00	2.50		575.00		
	4th Cross Road		1	209.00	2.50		522.50		
	Cross Road		1	25.00	2.50		62.50		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.00		776.00		
	2nd Cross Road(L-shape)		1	140.00	4.00		560.00		
	1st Cross Road		1	115.00	2.90		333.50		
	Venugopal Layout								
	5th Cross Road		1	93.00	4.50		418.50		
	4th Cross Road		1	72.00	2.00		144.00		
	3rd Cross Road		1	136.00	2.45		332.94		
	Main Road		1	320.00	4.60		1472.00		
	4th Phase yelahanka								
	2nd Main Road		1	75.00	6.20		465.00		
							28672.4	**100.17**	**2872114.31**
	Approved rate	**100.17**							
3	KSRRB 300-45. Scarifying stone metal crust 50mm to 100mm thick with pick axels along with pre mix carpet/ surface dressing and stacking of old servicable materials by manual means including of cost of labours charges complete as per specification. MORTH I Chapter 3								
							0.00	**89.04**	**0.00**
	Approved rate	**89.04**							
4	KSRRB M300-59.2. Loosening levelling and compacting original ground supporting embackment to facilitate placement of first layer of embackment / subgrade scarified to a depth of 150mm mixed with water at OMC and then compacted by rolling so as to achieve minimum dry density as given in table 300-2 for embackment/ subgrade including HOM construction , labour etc., complete as per specification. MORTH specification No. 305.3.4								
	Ams Extension	**Sqm**							
	3rd Main Road		1	205.00	6.50		1332.50		
	4th A Main road		1	160.00	6.50		1040.00		
	4th Main Road		1	162.00	6.50		1053.00		
	7th A Cross Road		1	101.00	7.00		707.00		
	5th A Main Road		1	153.00	4.00		612.00		
	6th A Main Road		1	144.00	4.00		576.00		
	oriental school road		1	216.50	8.00		1732.00		
	1st main AMS Extension		1	180.00	4.00		720.00		
	opposite to regancy school gate 2		1	96.00	7.00		672.00		
	Beside Arohana Stationary		1	100.00	5.50		550.00		
	Main Road 3rd		1	333.00	6.00		1998.00		
	Ams Layout								
	4th B Main Road		1	156.00	6.00		936.00		
	4th A Main Road		1	162.00	6.00		972.00		
	4th C Main Road		1	310.00	6.50		2015.00		
	3rd Main Road		1	238.00	10.00		2380.00		
	1st Cross Road AMS Extension		1	33.40	6.70		223.78		
	2nd Cross Road AMS Extension		1	82.00	6.60		541.20		
	3rd Cross Road AMS Extension		1	82.20	6.30		517.86		
	2nd Main Road		1	200.00	6.00		1200.00		
	3rd Cross Road		1	340.00	6.50		2210.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	2nd Cross Road		1	242.00	6.50		1573.00		
	1st Cross Road		1	240.00	6.50		1560.00		
	4th Cross Road		1	280.00	6.50		1820.00		
	5th Cross Road		1	290.00	6.50		1885.00		
	6th Cross Road		1	103.50	6.30		652.05		
	7th Cross Road		1	57.00	6.00		342.00		
	7th Main Road		1	300.00	9.00		2700.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20		518.88		
	1st Main Road AMS Layout		1	150.00	6.90		1035.00		
	Cross Road-3		1	150.00	6.00		900.00		
	Cross Road 1		1	50.00	7.00		350.00		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50		1035.00		
	4th Cross Road		1	209.00	4.50		940.50		
	Cross Road		1	25.00	4.00		100.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50		873.00		
	2nd Cross Road(L-shape)		1	140.00	4.50		630.00		
	1st Cross Road		1	115.00	4.50		517.50		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00		558.00		
	4th Cross Road		1	72.00	6.00		432.00		
	3rd Cross Road		1	136.00	5.00		680.00		
	Main Road		1	320.00	3.00		960.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20		504.24		
	Cross Road		1	118.00	1.23		145.14		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.20		279.36		
	2nd Main Road		1	325.00	1.35		438.75		
	2nd Main Road		1	44.00	1.32		58.08		
	5th Cross Left Side		1	93.00	1.30		120.90		
	1st Main Road		1	224.70	1.40		314.58		
	5th Cross Road		1	340.00	0.60		204.00		
	4th Main Road CHS 707		1	382.00	1.30		496.60		
	4th Main Left Side		1	81.40	1.40		113.96		
	Durgamba Temple Parallel Road		1	35.30	1.40		49.42		
	3rd Main Road 6th Cross Road CHS 707		1	296.70	1.40		415.38		
	3rd Main Cross Road		1	91.60	1.90		174.04		
	3rd Main 1st Cross		1	100.00	1.20		120.00		
	Baghyalaxmi Bar Road		1	308.00	1.30		400.40		
	3rd Main 5th Cross Road		1	91.80	1.30		119.34		
	2nd Main 3rd Cross		1	310.00	1.20		372.00		
	Kapila Layout Road		1	92.00	1.40		128.80		
	For Cobble								
	Kapila Block S-HISG-B3 Right side			5.60	3.10		17.36		
				18.90	14.10		266.49		
				7.20	14.20		102.24		
				2.20	4.40		9.68		
				4.00	1.95		7.80		
	Kapila Block S-HISG-B3 Back side			30.00	5.90		177.00		
				28.00	5.90		165.20		
	Kapila Block S-HISG-B3 Left side			9.00	5.00		45.00		
				12.00	1.30		15.60		
				9.00	2.40		21.60		
				3.10	2.50		7.75		
				5.00	1.00		5.00		
				3.00	2.00		6.00		
	Yamuna S-HIG-A8 Surrounding			9.80	6.60		64.68		
				9.40	1.00		9.40		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				30.00	7.50		225.00		
				2.00	7.50		15.00		
				9.50	1.60		15.20		
				9.50	4.50		42.75		
				4.10	2.60		10.66		
				6.70	2.10		14.07		
				5.60	5.00		28.00		
				5.50	1.80		9.90		
				5.00	2.30		11.50		
				4.60	4.00		18.40		
	S-HIG-C-04 Flat No 49-64 Front side			7.00	5.30		37.10		
				8.70	3.00		26.10		
				9.20	4.90		45.08		
				12.20	5.40		65.88		
	S-HIG-C-04 Flat No 49-64 Back side			13.20	6.00		79.20		
				12.45	5.00		62.25		
				1.80	5.00		9.00		
	Deduction for chambers abd sump tank		4.00	0.50	0.50		-1.00		
	Anurag Flat No 33-48 S-HIS-C-03 Front			28.50	5.90		168.15		
				4.20	2.50		10.50		
				20.50	4.00		82.00		
				30.00	4.30		129.00		
				8.00	4.00		32.00		
				18.50	8.30		153.55		
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50		165.00		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00		45.00		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40		214.60		
	Omsai S-HIG-C-8 Front side			25.00	6.50		162.50		
	Omsai S-HIG-C-8 Back side			24.00	8.40		201.60		
	Green View S-HIG-C-9 Front side			30.00	6.90		207.00		
				4.00	6.90		27.60		
	Green View S-HIG-C-9 left side			25.00	11.00		275.00		
	Swasthik S-HIG-C Right Side			12.00	5.70		68.40		
	Swasthik S-HIG-C Front Side			23.60	7.20		169.92		
	Square Yards S-HIG-01 Front Side			32.30	6.80		219.64		
	Square Yards S-HIG-01 Front Side			25.40	8.80		223.52		
	Omkar Appartment NHIG-C-6 (Front			28.00	2.30		64.40		
				9.00	3.30		29.70		
	Omkar Appartment NHIG-C-6 (Left			10.00	4.80		48.00		
				19.00	2.60		49.40		
	Omkar Appartment NHIG-C-6 (Right			16.00	7.30		116.80		
				13.50	3.70		49.95		
				9.00	3.30		29.70		
	Dhruva Appartments			14.00	10.00		140.00		
				3.00	2.00		6.00		
	Santa Shree Sevalal maharaj Park Front			9.00	6.90		62.10		
				9.00	3.60		32.40		
	Santa Shree Sevalal maharaj Park			15.00	5.00		75.00		
				12.50	2.70		33.75		
	Near Neha prakash Hospital Front side			30.00	5.00		150.00		
				6.00	5.00		30.00		
				3.00	5.00		15.00		
				2.40	5.00		12.00		
	Veersagar Main Road Government			5.00	1.50		7.50		
				5.00	1.50		7.50		
				4.00	1.50		6.00		
				4.00	1.50		6.00		
				4.00	1.50		6.00		
				4.00	1.50		6.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				3.50	1.50		5.48		
	Deduction Chambers and sump tanks		4.00	5.00	3.50		-70.00		
			6.00	1.00	1.00		-6.00		
	Shivakumar mahaswami Sabangana			3.00	25.00		75.00		
	Deduction Chambers and sump tanks		3.00	1.20	1.80		-6.48		
	Left side			13.00	25.00		325.00		
				4.40	2.80		12.32		
	Right side			3.00	30.00		90.00		
	deduction for benches		8.00	1.20	2.00		-19.20		
							52084.45	**25.60**	**1333361.92**
	Approved rate	**25.60**							
5	KSRRB M300-14 Excavation for roadswork in all types of soil by mechanical means including cutting and loading to tippers, trimming bottom ans side slopes, in accordance with requirement of lines, grades and cross sections, and transportation with a lead of 1.00 km and complete								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.23	306.48		
	4th A Main road		1	160.00	6.50	0.23	239.20		
	4th Main Road		1	162.00	6.50	0.23	242.19		
	7th A Cross Road		1	101.00	7.00	0.23	162.61		
	5th A Main Road		1	153.00	4.00	0.23	140.76		
	6th A Main Road		1	144.00	4.00	0.23	132.48		
	oriental school road		1	216.50	8.00	0.23	398.36		
	1st main AMS Extension		1	180.00	4.00	0.23	165.60		
	opposite to regancy school gate 2		1	96.00	7.00	0.23	154.56		
	Beside Arohana Stationary		1	100.00	5.50	0.23	126.50		
	Main Road 3rd		1	333.00	6.00	0.23	459.54		
	Ams Layout								
	4th B Main Road		1	156.00	6.00	0.23	215.28		
	4th A Main Road		1	162.00	6.00	0.23	223.56		
	4th C Main Road		1	310.00	6.50	0.23	463.45		
	3rd Main Road		1	238.00	10.00	0.23	547.40		
	1st Cross Road AMS Extension		1	33.40	6.70	0.23	51.47		
	2nd Cross Road AMS Extension		1	82.00	6.60	0.23	124.48		
	3rd Cross Road AMS Extension		1	82.20	6.30	0.23	119.11		
	2nd Main Road		1	200.00	6.00	0.23	276.00		
	3rd Cross Road		1	340.00	6.50	0.23	508.30		
	2nd Cross Road		1	242.00	6.50	0.23	361.79		
	1st Cross Road		1	240.00	6.50	0.23	358.80		
	4th Cross Road		1	280.00	6.50	0.23	418.60		
	5th Cross Road		1	290.00	6.50	0.23	433.55		
	6th Cross Road		1	103.50	6.30	0.23	149.97		
	7th Cross Road		1	57.00	6.00	0.23	78.66		
	7th Main Road		1	300.00	9.00	0.23	621.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20	0.23	119.34		
	1st Main Road AMS Layout		1	150.00	6.90	0.23	238.05		
	Cross Road-3		1	150.00	6.00	0.23	207.00		
	Cross Road 1		1	50.00	7.00	0.23	80.50		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50	0.23	238.05		
	4th Cross Road		1	209.00	4.50	0.23	216.32		
	Cross Road		1	25.00	4.00	0.23	23.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50	0.23	200.79		
	2nd Cross Road(L-shape)		1	140.00	4.50	0.23	144.90		
	1st Cross Road		1	115.00	4.50	0.23	119.03		
	Venugopal Layout								

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	5th Cross Road		1	93.00	6.00	0.23	128.34		
	4th Cross Road		1	72.00	6.00	0.23	99.36		
	3rd Cross Road		1	136.00	5.00	0.23	156.40		
	Main Road		1	320.00	6.50	0.23	478.40		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20	0.23	115.98		
	Cross Road		1	118.00	1.23	0.23	33.38		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50	0.23	80.32		
	2nd Main Road		1	250.00	1.35	0.23	77.63		
			1	75.00	7.00	0.23	120.75		
	2nd Main Road		2	44.00	1.32	0.23	26.72		
	5th Cross Left Side		1	93.00	1.30	0.23	27.81		
	1st Main Road		2	224.70	1.40	0.23	144.71		
	5th Cross Road		2	340.00	1.60	0.23	250.24		
	4th Main Road CHS 707		2	382.00	1.30	0.23	228.44		
	4th Main Left Side		2	81.40	1.40	0.23	52.42		
	Durgamba Temple Parallel Road		2	35.30	1.40	0.23	22.73		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.40	0.23	191.07		
	3rd Main Cross Road		2	91.60	1.90	0.23	80.06		
	3rd Main 1st Cross		2	100.00	1.20	0.23	55.20		
	Baghyalaxmi Bar Road		2	308.00	1.30	0.23	184.18		
	3rd Main 5th Cross Road		2	91.80	1.30	0.23	54.90		
	2nd Main 3rd Cross		2	310.00	1.20	0.23	171.12		
	Kapila Layout Road		1.00	92.00	1.40	0.23	29.62		
	For Cobble								
	Kapila Block S-HISG-B3 Right side			5.60	3.10	0.32	5.56		
				18.90	14.10	0.35	93.27		
				7.20	14.20	0.33	33.74		
				2.20	4.40	0.32	3.10		
				4.00	1.95	0.32	2.50		
	Kapila Block S-HISG-B3 Back side			30.00	5.90	0.35	61.95		
				28.00	5.90	0.32	52.86		
	Kapila Block S-HISG-B3 Left side			9.00	5.00	0.00	0.00		
				12.00	1.30	0.30	4.68		
				9.00	2.40	0.32	6.91		
				3.10	2.50	0.33	2.56		
				5.00	1.00	0.30	-1.50		
				3.00	2.00	0.30	0.00		
	Yamuna S-HIG-A8 Surrounding			9.80	6.60	0.30	-19.40		
				9.40	1.00	0.30	-2.82		
				30.00	7.50	0.33	74.25		
				2.00	7.50	0.32	4.80		
				9.50	1.60	0.35	5.32		
				9.50	4.50	0.30	12.83		
				4.10	2.60	0.35	3.73		
				6.70	2.10	0.32	4.50		
				5.60	5.00	0.32	8.96		
				5.50	1.80	0.33	3.27		
				5.00	2.30	0.33	3.83		
				4.60	4.00	0.32	5.89		
	S-HIG-C-04 Flat No 49-64 Front side			7.00	5.30	0.32	11.87		
				8.70	3.00	0.34	8.87		
				9.20	4.90	0.30	-13.52		
				12.20	5.40	0.30	0.00		
	S-HIG-C-04 Flat No 49-64 Back side			13.20	6.00	0.32	25.34		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				12.45	5.00	0.32	19.92		
				1.80	5.00	0.35	3.15		
	Deduction for chambers abd sump tank		4.00	0.50	0.50	0.32	-0.32		
	Anurag Flat No 33-48 S-HIS-C-03 Front side			28.50	5.90	0.36	60.53		
				4.20	2.50	0.32	3.36		
				20.50	4.00	0.31	25.42		
				30.00	4.30	0.30	0.00		
				8.00	4.00	0.32	10.24		
				18.50	8.30	0.31	47.60		
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50	0.34	56.10		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00	0.32	14.40		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40	0.32	68.67		
	Omsai S-HIG-C-8 Front side			25.00	6.50	0.32	52.00		
	Omsai S-HIG-C-8 Back side			24.00	8.40	0.30	60.48		
	Green View S-HIG-C-9 Front side			30.00	6.90	0.30	62.10		
				4.00	6.90	0.32	8.83		
	Green View S-HIG-C-9 left side			25.00	11.00	0.31	85.25		
	Swasthik S-HIG-C Right Side			12.00	5.70	0.28	19.15		
	Swasthik S-HIG-C Front Side			23.60	7.20	0.26	44.18		
	Square Yards S-HIG-01 Front Side			32.30	6.80	0.36	79.07		
	Square Yards S-HIG-01 Front Side			25.40	8.80	0.20	44.70		
	Omkar Appartment NHIG-C-6 (Front side)			28.00	2.30	0.25	16.10		
				9.00	3.30	0.30	8.91		
	Omkar Appartment NHIG-C-6 (Left side)			10.00	4.80	0.37	17.76		
				19.00	2.60	0.31	15.31		
	Omkar Appartment NHIG-C-6 (Right side)			16.00	7.30	0.33	38.54		
				13.50	3.70	0.30	14.99		
				9.00	3.30	0.20	5.94		
	Dhruva Appartments			14.00	10.00	0.28	39.20		
				3.00	2.00	0.26	1.56		
	Santa Shree Sevalal maharaj Park Front			9.00	6.90	0.24	14.90		
				9.00	3.60	0.29	9.40		
	Santa Shree Sevalal maharaj Park Opposite			21.00	5.00	0.50	52.50		
				12.50	2.70	0.28	9.45		
	Near Neha prakash Hospital Front side			30.00	5.00	0.26	39.00		
				6.00	5.00	0.30	9.00		
				30.00	5.00	0.20	30.00		
				24.50	5.00	0.28	34.30		
	Veersagar Main Road Government hospital			9.50	1.50	0.26	3.71		
				9.50	1.50	0.24	3.42		
				19.20	1.50	0.29	8.35		
				19.20	1.50	0.50	14.40		
				19.20	1.50	0.28	8.06		
				14.00	1.50	0.26	5.46		
				7.00	1.50	0.30	3.15		
	Deduction Chambers and sump tanks		4.00	5.00	3.50	0.20	-14.00		
			6.00	1.00	1.00	0.28	-1.68		
	Shivakumar mahaswami Sabangana Front portion		1.00	35.00	43.00	0.26	391.30		
	Deduction Chambers and sump tanks		3.00	1.20	1.80	0.24	-1.56		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Left side			13.00	38.60	0.29	145.52		
				4.40	2.80	0.50	6.16		
	Right side			13.00	38.60	0.28	140.50		
	deduction for benches		8.00	1.20	2.00	0.26	-4.99		
							14107.40	**45.63**	**643720.66**
	Approved rate	**45.63**							
6	KSRRB M300-19 Removal of unservicable soil including excavation , loading and disposal but excluding replacement by suitable soil which shall be paid seperately as per clause 300.5 complete as per specifications. MORTH specification No.301								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.23	306.48		
	4th A Main road		1	160.00	6.50	0.23	239.20		
	4th Main Road		1	162.00	6.50	0.23	242.19		
	7th A Cross Road		1	101.00	7.00	0.23	162.61		
	5th A Main Road		1	153.00	4.00	0.23	140.76		
	6th A Main Road		1	144.00	4.00	0.23	132.48		
	oriental school road		1	216.50	8.00	0.23	398.36		
	1st main AMS Extension		1	180.00	4.00	0.23	165.60		
	opposite to regancy school gate 2		1	96.00	7.00	0.23	154.56		
	Beside Arohana Stationary		1	100.00	5.50	0.23	126.50		
	Main Road 3rd		1	333.00	6.00	0.23	459.54		
	Ams Layout								
	4th B Main Road		1	156.00	6.00	0.23	215.28		
	4th A Main Road		1	162.00	6.00	0.23	223.56		
	4th C Main Road		1	310.00	6.50	0.23	463.45		
	3rd Main Road		1	238.00	10.00	0.23	547.40		
	1st Cross Road AMS Extension		1	33.40	6.70	0.23	51.47		
	2nd Cross Road AMS Extension		1	82.00	6.60	0.23	124.48		
	3rd Cross Road AMS Extension		1	82.20	6.30	0.23	119.11		
	2nd Main Road		1	200.00	6.00	0.23	276.00		
	3rd Cross Road		1	340.00	6.50	0.23	508.30		
	2nd Cross Road		1	242.00	6.50	0.23	361.79		
	1st Cross Road		1	240.00	6.50	0.23	358.80		
	4th Cross Road		1	280.00	6.50	0.23	418.60		
	5th Cross Road		1	290.00	6.50	0.23	433.55		
	6th Cross Road		1	103.50	6.30	0.23	149.97		
	7th Cross Road		1	57.00	6.00	0.23	78.66		
	7th Main Road		1	300.00	9.00	0.23	621.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20	0.23	119.34		
	1st Main Road AMS Layout		1	150.00	6.90	0.23	238.05		
	Cross Road-3		1	150.00	6.00	0.23	207.00		
	Cross Road 1		1	50.00	7.00	0.23	80.50		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50	0.23	238.05		
	4th Cross Road		1	209.00	4.50	0.23	216.32		
	Cross Road		1	25.00	4.00	0.23	23.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50	0.23	200.79		
	2nd Cross Road(L-shape)		1	140.00	4.50	0.23	144.90		
	1st Cross Road		1	115.00	4.50	0.23	119.03		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00	0.23	128.34		
	4th Cross Road		1	72.00	6.00	0.23	99.36		
	3rd Cross Road		1	136.00	5.00	0.23	156.40		
	Main Road		1	320.00	6.50	0.23	478.40		
	4th Phase yelahanka								

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	2nd Main Road Near Kitchen 6		1	420.20	1.20	0.23	115.98		
	Cross Road		1	118.00	1.23	0.23	33.38		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50	0.23	80.32		
	2nd Main Road		1	250.00	1.35	0.23	77.63		
			1	75.00	7.00	0.23	120.75		
	2nd Main Road		2	44.00	1.32	0.23	26.72		
	5th Cross Left Side		1	93.00	1.30	0.23	27.81		
	1st Main Road		2	224.70	1.40	0.23	144.71		
	5th Cross Road		2	340.00	1.60	0.23	250.24		
	4th Main Road CHS 707		2	382.00	1.30	0.23	228.44		
	4th Main Left Side		2	81.40	1.40	0.23	52.42		
	Durgamba Temple Parallel Road		2	35.30	1.40	0.23	22.73		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.40	0.23	191.07		
	3rd Main Cross Road		2	91.60	1.90	0.23	80.06		
	3rd Main 1st Cross		2	100.00	1.20	0.23	55.20		
	Baghyalaxmi Bar Road		2	308.00	1.30	0.23	184.18		
	3rd Main 5th Cross Road		2	91.80	1.30	0.23	54.90		
	2nd Main 3rd Cross		2	310.00	1.20	0.23	171.12		
	Kapila Layout Road		1.00	92.00	1.40	0.23	29.62		
	For Cobble								
	Kapila Block S-HISG-B3 Right side			5.60	3.10	0.32	5.56		
				18.90	14.10	0.35	93.27		
				7.20	14.20	0.33	33.74		
				2.20	4.40	0.32	3.10		
				4.00	1.95	0.32	2.50		
	Kapila Block S-HISG-B3 Back side			30.00	5.90	0.35	61.95		
				28.00	5.90	0.32	52.86		
	Kapila Block S-HISG-B3 Left side			9.00	5.00	0.00	0.00		
				12.00	1.30	0.30	4.68		
				9.00	2.40	0.32	6.91		
				3.10	2.50	0.33	2.56		
				5.00	1.00	0.30	-1.50		
				3.00	2.00	0.30	0.00		
	Yamuna S-HIG-A8 Surrounding			9.80	6.60	0.30	-19.40		
				9.40	1.00	0.30	-2.82		
				30.00	7.50	0.33	74.25		
				2.00	7.50	0.32	4.80		
				9.50	1.60	0.35	5.32		
				9.50	4.50	0.30	12.83		
				4.10	2.60	0.35	3.73		
				6.70	2.10	0.32	4.50		
				5.60	5.00	0.32	8.96		
				5.50	1.80	0.33	3.27		
				5.00	2.30	0.33	3.83		
				4.60	4.00	0.32	5.89		
	S-HIG-C-04 Flat No 49-64 Front side			7.00	5.30	0.32	11.87		
				8.70	3.00	0.34	8.87		
				9.20	4.90	0.30	-13.52		
				12.20	5.40	0.30	0.00		
	S-HIG-C-04 Flat No 49-64 Back side			13.20	6.00	0.32	25.34		
				12.45	5.00	0.32	19.92		
				1.80	5.00	0.35	3.15		
	Deduction for chambers abd sump tank		4.00	0.50	0.50	0.32	-0.32		
	Anurag Flat No 33-48 S-HIS-C-03 Front side			28.50	5.90	0.36	60.53		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				4.20	2.50	0.32	3.36		
				20.50	4.00	0.31	25.42		
				30.00	4.30	0.30	0.00		
				8.00	4.00	0.32	10.24		
				18.50	8.30	0.31	47.60		
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50	0.34	56.10		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00	0.32	14.40		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40	0.32	68.67		
	Omsai S-HIG-C-8 Front side			25.00	6.50	0.32	52.00		
	Omsai S-HIG-C-8 Back side			24.00	8.40	0.30	60.48		
	Green View S-HIG-C-9 Front side			30.00	6.90	0.30	62.10		
				4.00	6.90	0.32	8.83		
	Green View S-HIG-C-9 left side			25.00	11.00	0.31	85.25		
	Swasthik S-HIG-C Right Side			12.00	5.70	0.28	19.15		
	Swasthik S-HIG-C Front Side			23.60	7.20	0.26	44.18		
	Square Yards S-HIG-01 Front Side			32.30	6.80	0.36	79.07		
	Square Yards S-HIG-01 Front Side			25.40	8.80	0.20	44.70		
	Omkar Appartment NHIG-C-6 (Front side)			28.00	2.30	0.25	16.10		
				9.00	3.30	0.30	8.91		
	Omkar Appartment NHIG-C-6 (Left side)			10.00	4.80	0.37	17.76		
				19.00	2.60	0.31	15.31		
	Omkar Appartment NHIG-C-6 (Right side)			16.00	7.30	0.33	38.54		
				13.50	3.70	0.30	14.99		
				9.00	3.30	0.20	5.94		
	Dhruva Appartments			14.00	10.00	0.28	39.20		
				3.00	2.00	0.26	1.56		
	Santa Shree Sevalal maharaj Park Front			9.00	6.90	0.24	14.90		
				9.00	3.60	0.29	9.40		
	Santa Shree Sevalal maharaj Park Opposite			21.00	5.00	0.50	52.50		
				12.50	2.70	0.28	9.45		
	Near Neha prakash Hospital Front side			30.00	5.00	0.26	39.00		
				6.00	5.00	0.30	9.00		
				30.00	5.00	0.20	30.00		
				24.50	5.00	0.28	34.30		
	Veersagar Main Road Government hospital			9.50	1.50	0.26	3.71		
				9.50	1.50	0.24	3.42		
				19.20	1.50	0.29	8.35		
				19.20	1.50	0.50	14.40		
				19.20	1.50	0.28	8.06		
				14.00	1.50	0.26	5.46		
				7.00	1.50	0.30	3.15		
	Deduction Chambers and sump tanks		4.00	5.00	3.50	0.20	-14.00		
			6.00	1.00	1.00	0.28	-1.68		
	Shivakumar mahaswami Sabangana Front portion		1.00	35.00	43.00	0.26	391.30		
	Deduction Chambers and sump tanks		3.00	1.20	1.80	0.24	-1.56		
	Left side			13.00	38.60	0.29	145.52		
				4.40	2.80	0.50	6.16		
	Right side			13.00	38.60	0.28	140.50		
	deduction for benches		8.00	1.20	2.00	0.26	-4.99		
							14107.40	**36.73**	**518164.80**

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Approved rate	36.73							
7	Construction of granular sub-base Grading-v as sub-base and drainage layer by providing coarse graded crushed stone aggregates of granitr/trap/basalt materials, mixing by mix in place method by rotavatory at OMC spreading in uniform layers with motor grader on prepared surface and compacting with vibrator power roller to achieve the 98% proctor density, complete as per specifications. Clause 401 of MORTH V revision.								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.15	199.88		
	4th A Main road		1	160.00	6.50	0.15	156.00		
	4th Main Road		1	162.00	6.50	0.15	157.95		
	7th A Cross Road		1	101.00	7.00	0.15	106.05		
	5th A Main Road		1	153.00	4.00	0.15	91.80		
	6th A Main Road		1	144.00	4.00	0.15	86.40		
	oriental school road		1	216.50	8.00	0.15	259.80		
	1st main AMS Extension		1	180.00	4.00	0.15	108.00		
	opposite to regancy school gate 2		1	96.00	7.00	0.15	100.80		
	Beside Arohana Stationary		1	100.00	5.50	0.15	82.50		
	Main Road 3rd		1	333.00	6.00	0.15	299.70		
	Ams Layout								
	4th B Main Road		1	156.00	6.00	0.15	140.40		
	4th A Main Road		1	162.00	6.00	0.15	145.80		
	4th C Main Road		1	310.00	6.50	0.15	302.25		
	3rd Main Road		1	238.00	10.00	0.15	357.00		
	1st Cross Road AMS Extension		1	33.40	6.70	0.15	33.57		
	2nd Cross Road AMS Extension		1	82.00	6.60	0.15	81.18		
	3rd Cross Road AMS Extension		1	82.20	6.30	0.15	77.68		
	2nd Main Road		1	200.00	6.00	0.15	180.00		
	3rd Cross Road		1	340.00	6.50	0.15	331.50		
	2nd Cross Road		1	242.00	6.50	0.15	235.95		
	1st Cross Road		1	240.00	6.50	0.15	234.00		
	4th Cross Road		1	280.00	6.50	0.15	273.00		
	5th Cross Road		1	290.00	6.50	0.15	282.75		
	6th Cross Road		1	103.50	6.30	0.15	97.81		
	7th Cross Road		1	57.00	6.00	0.15	51.30		
	7th Main Road		1	300.00	9.00	0.15	405.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20	0.15	77.83		
	1st Main Road AMS Layout		1	150.00	6.90	0.15	155.25		
	Cross Road-3		1	150.00	6.00	0.15	135.00		
	Cross Road 1		1	50.00	7.00	0.15	52.50		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50	0.15	155.25		
	4th Cross Road		1	209.00	4.50	0.15	141.08		
	Cross Road		1	25.00	4.00	0.15	15.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50	0.15	130.95		
	2nd Cross Road(L-shape)		1	140.00	4.50	0.15	94.50		
	1st Cross Road		1	115.00	4.50	0.15	77.63		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00	0.15	83.70		
	4th Cross Road		1	72.00	6.00	0.15	64.80		
	3rd Cross Road		1	136.00	5.00	0.15	102.00		
	Main Road		1	320.00	6.50	0.15	312.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20	0.15	75.64		
	Cross Road		1	118.00	1.23	0.15	21.77		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50	0.15	52.38		
	2nd Main Road		1	250.00	1.35	0.15	50.63		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
			1	75.00	7.00	0.15	78.75		
	2nd Main Road		2	44.00	1.32	0.15	17.42		
	5th Cross Left Side		1	93.00	1.30	0.15	18.14		
	1st Main Road		2	224.70	1.40	0.15	94.37		
	5th Cross Road		2	340.00	1.60	0.15	163.20		
	4th Main Road CHS 707		2	382.00	1.30	0.15	148.98		
	4th Main Left Side		2	81.40	1.40	0.15	34.19		
	Durgamba Temple Parallel Road		2	35.30	1.40	0.15	14.83		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.40	0.15	124.61		
	3rd Main Cross Road		2	91.60	1.90	0.15	52.21		
	3rd Main 1st Cross		2	100.00	1.20	0.15	36.00		
	Baghyalaxmi Bar Road		2	308.00	1.30	0.15	120.12		
	3rd Main 5th Cross Road		2	91.80	1.30	0.15	35.80		
	2nd Main 3rd Cross		2	310.00	1.05	0.15	97.65		
	Kapila Layout Road		1.00	92.00	1.40	0.15	19.32		
							7731.69	**1947.75**	**15059407.96**
	Approved rate	**1947.75**							
8	KSRRB M400-17 Proving, laying, spreading and compacting crushed stone aggregates of granite/trap/basalt to wetmix macadam specifications including pre mixing the materials with water at OMC in mechanical mix plant carriage of mixed materials by tippers to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory rollers to achieve the desired density complete as per specifications. MORTH specification No. 406								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.23	306.48		
	4th A Main road		1	160.00	6.50	0.23	239.20		
	4th Main Road		1	162.00	6.50	0.23	242.19		
	7th A Cross Road		1	101.00	7.00	0.23	162.61		
	5th A Main Road		1	153.00	4.00	0.23	140.76		
	6th A Main Road		1	144.00	4.00	0.23	132.48		
	oriental school road		1	216.50	8.00	0.23	398.36		
	1st main AMS Extension		1	180.00	4.00	0.23	165.60		
	opposite to regancy school gate 2		1	96.00	7.00	0.23	154.56		
	Beside Arohana Stationary		1	100.00	5.50	0.23	126.50		
	Main Road 3rd		1	333.00	6.00	0.23	459.54		
	Ams Layout								
	4th B Main Road		1	156.00	6.00	0.23	215.28		
	4th A Main Road		1	162.00	6.00	0.23	223.56		
	4th C Main Road		1	310.00	6.50	0.23	463.45		
	3rd Main Road		1	238.00	10.00	0.23	547.40		
	1st Cross Road AMS Extension		1	33.40	6.70	0.23	51.47		
	2nd Cross Road AMS Extension		1	82.00	6.60	0.23	124.48		
	3rd Cross Road AMS Extension		1	82.20	6.30	0.23	119.11		
	2nd Main Road		1	200.00	6.00	0.23	276.00		
	3rd Cross Road		1	340.00	6.50	0.23	508.30		
	2nd Cross Road		1	242.00	6.50	0.23	361.79		
	1st Cross Road		1	240.00	6.50	0.23	358.80		
	4th Cross Road		1	280.00	6.50	0.23	418.60		
	5th Cross Road		1	290.00	6.50	0.23	433.55		
	6th Cross Road		1	103.50	6.30	0.23	149.97		
	7th Cross Road		1	57.00	6.00	0.23	78.66		
	7th Main Road		1	300.00	9.00	0.23	621.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20	0.23	119.34		
	1st Main Road AMS Layout		1	150.00	6.90	0.23	238.05		
	Cross Road-3		1	150.00	6.00	0.23	207.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Cross Road 1		1	50.00	7.00	0.23	80.50		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50	0.23	238.05		
	4th Cross Road		1	209.00	4.50	0.23	216.32		
	Cross Road		1	25.00	4.00	0.23	23.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50	0.23	200.79		
	2nd Cross Road(L-shape)		1	140.00	4.50	0.23	144.90		
	1st Cross Road		1	115.00	4.50	0.23	119.03		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00	0.23	128.34		
	4th Cross Road		1	72.00	6.00	0.23	99.36		
	3rd Cross Road		1	136.00	5.00	0.23	156.40		
	Main Road		1	320.00	6.50	0.23	478.40		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20	0.23	115.98		
	Cross Road		1	118.00	1.23	0.23	33.38		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50	0.23	80.32		
	2nd Main Road		1	250.00	1.35	0.23	77.63		
			1	75.00	7.00	0.23	120.75		
	2nd Main Road		2	44.00	1.32	0.23	26.72		
	5th Cross Left Side		1	93.00	1.30	0.23	27.81		
	1st Main Road		2	224.70	1.40	0.23	144.71		
	5th Cross Road		2	340.00	1.60	0.23	250.24		
	4th Main Road CHS 707		2	382.00	1.30	0.23	228.44		
	4th Main Left Side		2	81.40	1.40	0.23	52.42		
	Durgamba Temple Parallel Road		2	35.30	1.40	0.23	22.73		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.40	0.23	191.07		
	3rd Main Cross Road		2	91.60	1.90	0.23	80.06		
	3rd Main 1st Cross		2	100.00	1.20	0.23	55.20		
	Baghyalaxmi Bar Road		2	308.00	1.30	0.23	184.18		
	3rd Main 5th Cross Road		2	91.80	1.30	0.23	54.90		
	2nd Main 3rd Cross		2	310.00	1.15	0.23	163.99		
	Kapila Layout Road		1.00	92.00	1.40	0.23	29.62		
	For Cobble								
	Kapila Block S-HISG-B3 Right side			5.60	3.10	0.23	3.99		
				18.90	14.10	0.23	61.29		
				7.20	14.20	0.22	22.49		
				2.20	4.40	0.20	1.94		
				4.00	1.95	0.23	1.79		
	Kapila Block S-HISG-B3 Back side			30.00	5.90	0.20	35.40		
				28.00	5.90	0.22	36.34		
	Kapila Block S-HISG-B3 Left side			9.00	5.00	0.23	10.35		
				12.00	1.30	0.23	3.59		
				9.00	2.40	0.20	4.32		
				3.10	2.50	0.20	1.55		
				5.00	1.00	0.20	1.00		
				3.00	2.00	0.20	1.20		
	Yamuna S-HIG-A8 Surrounding			9.80	6.60	0.23	14.88		
				9.40	1.00	0.22	2.07		
				30.00	7.50	0.22	49.50		
				2.00	7.50	0.22	3.30		
				9.50	1.60	0.23	3.50		
				9.50	4.50	0.23	9.83		
				4.10	2.60	0.22	2.35		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				6.70	2.10	0.23	3.24		
				5.60	5.00	0.23	6.44		
				5.50	1.80	0.22	2.18		
				5.00	2.30	0.22	2.53		
				4.60	4.00	0.20	3.68		
	S-HIG-C-04 Flat No 49-64 Front side			7.00	5.30	0.20	7.42		
				8.70	3.00	0.20	5.22		
				9.20	4.90	0.23	10.37		
				12.20	5.40	0.22	14.49		
	S-HIG-C-04 Flat No 49-64 Back side			13.20	6.00	0.20	15.84		
				12.45	5.00	0.20	12.45		
				1.80	5.00	0.20	1.80		
	Deduction for chambers abd sump tank		4.00	0.50	0.50	0.20	-0.20		
	Anurag Flat No 33-48 S-HIS-C-03 Front side			28.50	5.90	0.30	50.45		
				4.20	2.50	0.23	2.42		
				20.50	4.00	0.23	18.86		
				30.00	4.30	0.22	28.38		
				8.00	4.00	0.20	6.40		
				18.50	8.30	0.20	30.71		
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50	0.23	37.95		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00	0.30	13.50		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40	0.20	42.92		
	Omsai S-HIG-C-8 Front side			25.00	6.50	0.23	37.38		
	Omsai S-HIG-C-8 Back side			24.00	8.40	0.26	52.42		
	Green View S-HIG-C-9 Front side			30.00	6.90	0.36	74.52		
				4.00	6.90	0.35	9.66		
	Green View S-HIG-C-9 left side			25.00	11.00	0.30	82.50		
	Swasthik S-HIG-C Right Side			12.00	5.70	0.30	20.52		
	Swasthik S-HIG-C Front Side			23.60	7.20	0.23	39.08		
	Square Yards S-HIG-01 Front Side			32.30	6.80	0.19	41.73		
	Square Yards S-HIG-01 Front Side			25.40	8.80	0.32	71.53		
	Omkar Appartment NHIG-C-6 (Front side)			28.00	2.30	0.36	23.18		
				9.00	3.30	0.21	6.24		
	Omkar Appartment NHIG-C-6 (Left side)			10.00	4.80	0.23	11.04		
				19.00	2.60	0.21	10.37		
	Omkar Appartment NHIG-C-6 (Right side)			16.00	7.30	0.25	29.20		
				13.50	3.70	0.19	9.49		
				9.00	3.30	0.39	11.58		
	Dhruva Appartments			14.00	10.00	0.20	28.00		
				3.00	2.00	0.10	0.60		
	Santa Shree Sevalal maharaj Park Front			9.00	6.90	0.23	14.28		
				9.00	3.60	0.20	6.48		
	Santa Shree Sevalal maharaj Park Opposite			21.00	5.00	0.22	23.10		
				12.50	2.70	0.26	8.78		
	Near Neha prakash Hospital Front side			30.00	5.00	0.30	45.00		
				6.00	5.00	0.30	9.00		
				30.00	5.00	0.30	45.00		
				24.50	5.00	0.19	23.28		
	Veersagar Main Road Government hospital			9.50	1.50	0.20	2.85		
				9.50	1.50	0.26	3.71		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				19.20	1.50	0.30	8.64		
				19.20	1.50	0.32	9.22		
				19.20	1.50	0.33	9.50		
				14.00	1.50	0.33	6.93		
				7.00	1.50	0.23	2.42		
	Deduction Chambers and sump tanks		4.00	5.00	3.50	0.20	-14.00		
			6.00	1.00	1.00	0.30	-1.80		
	Shivakumar mahaswami Sabangana Front portion			35.00	43.00	0.23	346.15		
	Deduction Chambers and sump tanks		3.00	1.20	1.80	0.23	-1.49		
	Left side			13.00	38.60	0.26	130.47		
				4.40	2.80	0.23	2.83		
	Right side			13.00	38.60	0.23	115.41		
	deduction for benches		8.00	1.20	2.00	0.21	-4.03		
							13802.91	**2101.34**	**29004610.47**
	Approved rate	**2101.34**							
9	KSRRB 500-2 Cleaning the existing black topped surface with brooms soft brush and finallydusting with old gunny bags and /or compressed air to achieve bituminous treatment including cost of all materials. Labour, HOM of mechanical complete as per specifications MORTH specifications clause 501								
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	8.50		3571.70		
	Cross Road		1	118.00	6.50		767.00		
	2nd Main 2nd Cross Road CHS 707		1	232.80	4.50		1047.60		
	2nd Main Road		1	250.00	4.50		1125.00		
			1	75.00	0.00		0.00		
	2nd Main Road		1	44.00	3.00		132.00		
	5th Cross Left Side		1	93.00	3.00		279.00		
	1st Main Road		1	224.70	4.00		898.80		
	5th Cross Road		1	340.00	5.00		1700.00		
	4th Main Road CHS 707		1	382.00	6.40		2444.80		
	4th Main Left Side		1	81.40	4.10		333.74		
	Durgamba Temple Parallel Road		1	35.30	4.00		141.20		
	3rd Main Road 6th Cross Road CHS 707		1	296.70	4.10		1216.47		
	3rd Main Cross Road		1	91.60	2.40		219.84		
	3rd Main 1st Cross		1	100.00	2.90		290.00		
	Baghyalaxmi Bar Road		1	308.00	7.50		2310.00		
	3rd Main 5th Cross Road		1	91.80	3.50		321.30		
	2nd Main 3rd Cross		1	310.00	3.50		1085.00		
	Kapila Layout Road		1	92.00	4.80		441.60		
							18325.05	**5.56**	**101887.28**
	Approved rate	**5.56**							
10	KSRRB M500-6 providing and applying prime coat with s.s bituminous emulsion on prepared surface of granular base such as WMM including cleaning of roads surface and spraying primer at the rate of 0.60 kg per sqm using mechanical means complete as per specifications MORTH specifications No. 502								
	Ams Extension								
	3rd Main Road		1	205.00	6.50		1332.50		
	4th A Main road		1	160.00	6.50		1040.00		
	4th Main Road		1	162.00	6.50		1053.00		
	7th A Cross Road		1	101.00	7.00		707.00		
	5th A Main Road		1	153.00	4.00		612.00		
	6th A Main Road		1	144.00	4.00		576.00		
	oriental school road		1	216.50	8.00		1732.00		
	1st main AMS Extension		1	180.00	4.00		720.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	opposite to regancy school gate 2		1	96.00	7.00		672.00		
	Beside Arohana Stationary		1	100.00	5.50		550.00		
	Main Road 3rd		1	333.00	6.00		1998.00		
	Ams Layout								
	4th B Main Road		1	156.00	6.00		936.00		
	4th A Main Road		1	162.00	6.00		972.00		
	4th C Main Road		1	310.00	6.50		2015.00		
	3rd Main Road		1	238.00	10.00		2380.00		
	1st Cross Road AMS Extension		1	33.40	6.70		223.78		
	2nd Cross Road AMS Extension		1	82.00	6.60		541.20		
	3rd Cross Road AMS Extension		1	82.20	6.30		517.86		
	2nd Main Road		1	200.00	6.00		1200.00		
	3rd Cross Road		1	340.00	6.50		2210.00		
	2nd Cross Road		1	242.00	6.50		1573.00		
	1st Cross Road		1	240.00	6.50		1560.00		
	4th Cross Road		1	280.00	6.50		1820.00		
	5th Cross Road		1	290.00	6.50		1885.00		
	6th Cross Road		1	103.50	6.30		652.05		
	7th Cross Road		1	57.00	6.00		342.00		
	7th Main Road		1	300.00	9.00		2700.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20		518.88		
	1st Main Road AMS Layout		1	150.00	6.90		1035.00		
	Cross Road-3		1	150.00	6.00		900.00		
	Cross Road 1		1	50.00	7.00		350.00		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50		1035.00		
	4th Cross Road		1	209.00	4.50		940.50		
	Cross Road		1	25.00	4.00		100.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50		873.00		
	2nd Cross Road(L-shape)		1	140.00	4.50		630.00		
	1st Cross Road		1	115.00	4.50		517.50		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00		558.00		
	4th Cross Road		1	72.00	6.00		432.00		
	3rd Cross Road		1	136.00	5.00		680.00		
	Main Road		1	320.00	6.50		2080.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20		504.24		
	Cross Road		1	118.00	1.23		145.14		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50		349.20		
	2nd Main Road		1	250.00	1.35		337.50		
			1	75.00	7.00		525.00		
	2nd Main Road		2	44.00	1.32		116.16		
	5th Cross Left Side		1	93.00	1.30		120.90		
	1st Main Road		2	224.70	1.40		629.16		
	5th Cross Road		2	340.00	1.60		1088.00		
	4th Main Road CHS 707		2	382.00	1.30		993.20		
	4th Main Left Side		2	81.40	1.40		227.92		
	Durgamba Temple Parallel Road		2	35.30	1.40		98.84		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.40		830.76		
	3rd Main Cross Road		2	91.60	1.50		274.80		
	3rd Main 1st Cross		2	100.00	1.20		240.00		
	Baghyalaxmi Bar Road		2	308.00	1.30		800.80		
	3rd Main 5th Cross Road		2	91.80	1.30		238.68		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	2nd Main 3rd Cross		2	310.00	1.15		713.00		
	Kapila Layout Road		1.00	92.00	1.53		141.06		
							51544.63	35.62	1836019.85
	Approved rate	35.62							
11	KSRRB 500-7 Providing and applying tack coat using 80/100 grade bitumen (VG10) on the prepared black topped surface at 0.25 kg per sqm heating bitumen in boiler fitted with spray set (excluding cleaning of road surface) including cost of all materials labour HOM of machineries complete as per specifications MORTH Chapter 5								
	Ams Extension								
	3rd Main Road		1	205.00	6.50		1332.50		
	4th A Main road		1	160.00	6.50		1040.00		
	4th Main Road		1	162.00	6.50		1053.00		
	7th A Cross Road		1	101.00	7.00		707.00		
	5th A Main Road		1	153.00	4.00		612.00		
	6th A Main Road		1	144.00	4.00		576.00		
	oriental school road		1	216.50	8.00		1732.00		
	1st main AMS Extension		1	180.00	4.00		720.00		
	opposite to regancy school gate 2		1	96.00	7.00		672.00		
	Beside Arohana Stationary		1	100.00	5.50		550.00		
	Main Road 3rd		1	333.00	6.00		1998.00		
	Ams Layout								
	4th B Main Road		1	156.00	6.00		936.00		
	4th A Main Road		1	162.00	6.00		972.00		
	4th C Main Road		1	310.00	6.50		2015.00		
	3rd Main Road		1	238.00	9.60		2284.80		
	1st Cross Road AMS Extension		1	33.40	6.70		223.78		
	2nd Cross Road AMS Extension		1	82.00	6.60		541.20		
	3rd Cross Road AMS Extension		1	82.20	6.30		517.86		
	2nd Main Road		1	200.00	6.00		1200.00		
	3rd Cross Road		1	340.00	6.50		2210.00		
	2nd Cross Road		1	242.00	6.50		1573.00		
	1st Cross Road		1	240.00	6.50		1560.00		
	4th Cross Road		1	280.00	6.00		1680.00		
	5th Cross Road		1	290.00	6.00		1740.00		
	6th Cross Road		1	103.50	6.30		652.05		
	7th Cross Road		1	57.00	6.00		342.00		
	7th Main Road		1	300.00	7.90		2370.00		
	1st 'A' Main Road AMS Layout		1	56.40	9.20		518.88		
	1st Main Road AMS Layout		1	150.00	6.90		1035.00		
	Cross Road-3		1	150.00	6.00		900.00		
	Cross Road 1		1	50.00	6.00		300.00		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50		1035.00		
	4th Cross Road		1	209.00	4.50		940.50		
	Cross Road		1	25.00	4.00		100.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50		873.00		
	2nd Cross Road(L-shape)		1	140.00	4.50		630.00		
	1st Cross Road		1	115.00	4.50		517.50		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00		558.00		
	4th Cross Road		1	72.00	6.00		432.00		
	3rd Cross Road		1	136.00	5.00		680.00		
	Main Road		1	320.00	6.50		2080.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	8.50		3571.70		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Cross Road		1	118.00	6.50		767.00		
	2nd Main 2nd Cross Road CHS 707		1	232.80	4.50		1047.60		
	2nd Main Road		1	250.00	4.50		1125.00		
			1	75.00	0.00		0.00		
	2nd Main Road		1	44.00	3.00		132.00		
	5th Cross Left Side		1	93.00	3.00		279.00		
	1st Main Road		1	224.70	4.00		898.80		
	5th Cross Road		1	340.00	5.00		1700.00		
	4th Main Road CHS 707		1	382.00	6.40		2444.80		
	4th Main Left Side		1	81.40	4.10		333.74		
	Durgamba Temple Parallel Road		1	35.30	4.00		141.20		
	3rd Main Road 6th Cross Road CHS 707		1	296.70	4.10		1216.47		
	3rd Main Cross Road		1	91.60	2.40		219.84		
	3rd Main 1st Cross		1	100.00	2.90		290.00		
	Baghyalaxmi Bar Road		1	308.00	7.50		2310.00		
	3rd Main 5th Cross Road		1	91.80	3.50		321.30		
	2nd Main 3rd Cross		1	310.00	3.18		986.40		
	Kapila Layout Road		1	92.00	4.80		441.60		
							60636.52	**13.36**	**810103.97**
	Approved rate	**13.36**							
12	KSRRB M500-17. Providing and laying dense graded bituminous macadam using crushed aggregates of specified grading, premixed with VG30 grade bituminous binder and, transporting the hot mix to work site, laying to the required grade, lavel and allignment, rolling with smooth wheeled, vibratory and tandom rollers to achieve the desired compaction as per MORTH table 500-10 Complete in all respects compete as per specifications MORTH specification No. 507. using 100/120 TPH capacity HMP with sensor paver Gr-II (50mm to 75mm) with 4.5 % VG-30 Bitumen								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.05	66.63		
	4th A Main road		1	160.00	6.50	0.05	52.00		
	4th Main Road		1	162.00	6.50	0.05	52.65		
	7th A Cross Road		1	101.00	7.00	0.05	35.35		
	5th A Main Road		1	153.00	4.00	0.05	30.60		
	6th A Main Road		1	144.00	4.00	0.05	28.80		
	oriental school road		1	216.50	8.00	0.05	86.60		
	1st main AMS Extension		1	180.00	4.00	0.05	36.00		
	opposite to regancy school gate 2		1	96.00	7.00	0.05	33.60		
	Beside Arohana Stationary		1	100.00	5.50	0.05	27.50		
	Main Road 3rd		1	333.00	6.00	0.05	99.90		
	Ams Layout								
	4th B Main Road		1	156.00	6.00	0.05	46.80		
	4th A Main Road		1	162.00	6.00	0.05	48.60		
	4th C Main Road		1	310.00	6.50	0.05	100.75		
	3rd Main Road		1	238.00	10.00	0.05	119.00		
	1st Cross Road AMS Extension		1	33.40	6.70	0.05	11.19		
	2nd Cross Road AMS Extension		1	82.00	6.60	0.05	27.06		
	3rd Cross Road AMS Extension		1	82.20	6.30	0.05	25.89		
	2nd Main Road		1	200.00	6.00	0.05	60.00		
	3rd Cross Road		1	340.00	6.50	0.05	110.50		
	2nd Cross Road		1	242.00	6.50	0.05	78.65		
	1st Cross Road		1	240.00	6.50	0.05	78.00		
	4th Cross Road		1	280.00	6.50	0.05	91.00		
	5th Cross Road		1	290.00	6.50	0.05	94.25		
	6th Cross Road		1	103.50	6.30	0.05	32.60		
	7th Cross Road		1	57.00	6.00	0.05	17.10		
	7th Main Road		1	300.00	9.00	0.05	135.00		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	1st 'A' Main Road AMS Layout		1	56.40	9.20	0.05	25.94		
	1st Main Road AMS Layout		1	150.00	6.90	0.05	51.75		
	Cross Road-3		1	150.00	6.00	0.05	45.00		
	Cross Road 1		1	50.00	7.00	0.05	17.50		
	Swagat Layout								
	5th Cross Road		1	230.00	4.50	0.05	51.75		
	4th Cross Road		1	209.00	4.50	0.05	47.03		
	Cross Road		1	25.00	4.00	0.05	5.00		
	Akashavani Layout								
	3rd Cross Road		1	194.00	4.50	0.05	43.65		
	2nd Cross Road(L-shape)		1	140.00	4.50	0.05	31.50		
	1st Cross Road		1	115.00	4.50	0.05	25.88		
	Venugopal Layout								
	5th Cross Road		1	93.00	6.00	0.05	27.90		
	4th Cross Road		1	72.00	6.00	0.05	21.60		
	3rd Cross Road		1	136.00	6.00	0.05	40.80		
	Main Road		1	320.00	6.50	0.05	104.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		1	420.20	1.20	0.05	25.21		
	Cross Road		1	118.00	1.23	0.05	7.26		
	2nd Main 2nd Cross Road CHS 707		1	232.80	1.50	0.05	17.46		
	2nd Main Road		1	250.00	1.35	0.05	16.88		
			1	75.00	7.00	0.05	26.25		
	2nd Main Road		2	44.00	1.32	0.05	5.81		
	5th Cross Left Side		2	93.00	1.30	0.05	12.09		
	1st Main Road		2	224.70	1.40	0.05	31.46		
	5th Cross Road		2	340.00	1.60	0.05	54.40		
	4th Main Road CHS 707		2	382.00	1.80	0.05	68.76		
	4th Main Left Side		2	81.40	1.40	0.05	11.40		
	Durgamba Temple Parallel Road		2	35.30	1.40	0.05	4.94		
	3rd Main Road 6th Cross Road CHS 707		2	296.70	1.50	0.05	44.51		
	3rd Main Cross Road		2	91.60	1.50	0.05	13.74		
	3rd Main 1st Cross		2	100.00	1.20	0.05	12.00		
	Baghyalaxmi Bar Road		2	308.00	1.30	0.05	40.04		
	3rd Main 5th Cross Road		2	91.80	1.39	0.05	12.78		
	2nd Main 3rd Cross		2	310.00	1.80	0.05	55.80		
	Kapila Layout Road		1.00	92.00	1.53	0.05	7.05		
							2633.14	**8001.36**	**21068673.07**
	Approved rate	**8001.36**							
13	providing and laying bituminous concrete 40mm thick with hot mix plant, using 40-60 TPH capacity HMP with mechanical paver grading II (30-45mm) with 5.4% of modified bituminious binder consisting of 4.97% of VG-30 bitumen (60/70 grade) and o.43% of plastomeric thermoplastic(waste plastic) crushed aggregates of specified grading pre mixxed with bituminous binder and filler, transporting the hot mix to the work site, laying with a paver finisher to the require grade, level and allignment and rolling with the smooth wheeled, vibratory and tandom rollers to achieve the desired compaction in all respect complete as per specifications. Clause 507 of MORTH V revision as per IRC SP-53-2015. KPWD S.R 2018-19 It No. 21.78.12 Pg No. 171								
	Ams Extension								
	3rd Main Road		1	205.00	6.50	0.04	53.30		
	4th A Main road		1	160.00	6.50	0.04	41.60		
	4th Main Road		1	162.00	6.50	0.04	42.12		
	7th A Cross Road		1	101.00	7.00	0.04	28.28		
	5th A Main Road		1	153.00	4.00	0.04	24.48		
	6th A Main Road		1	144.00	4.00	0.04	23.04		
	oriental school road		1	216.50	8.00	0.04	69.28		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	1st main AMS Extension								
	opposite to regancy school gate 2		1	180.00	4.00	0.04	28.80		
	Beside Arohana Stationary		1	96.00	7.00	0.04	26.88		
	Main Road 3rd		1	100.00	5.50	0.04	22.00		
	Ams Layout		1	333.00	6.00	0.04	79.92		
	4th B Main Road								
	4th A Main Road		1	156.00	6.00	0.04	37.44		
	4th C Main Road		1	162.00	6.00	0.04	38.88		
	3rd Main Road		1	310.00	6.50	0.04	80.60		
	1st Cross Road AMS Extension		1	238.00	9.60	0.04	91.39		
	2nd Cross Road AMS Extension		1	33.40	6.70	0.04	8.95		
	3rd Cross Road AMS Extension		1	82.00	6.60	0.04	21.65		
	2nd Main Road		1	82.20	6.30	0.04	20.71		
	3rd Cross Road		1	200.00	6.00	0.04	48.00		
	2nd Cross Road		1	340.00	6.50	0.04	88.40		
	1st Cross Road		1	242.00	6.50	0.04	62.92		
	4th Cross Road		1	240.00	6.50	0.04	62.40		
	5th Cross Road		1	280.00	6.00	0.04	67.20		
	6th Cross Road		1	290.00	6.00	0.04	69.60		
	7th Cross Road		1	103.50	6.30	0.04	26.08		
	7th Main Road		1	57.00	6.00	0.04	13.68		
	1st 'A' Main Road AMS Layout		1	300.00	7.30	0.04	87.60		
	1st Main Road AMS Layout		1	56.40	8.60	0.04	19.40		
	Cross Road-3		1	150.00	6.90	0.04	41.40		
	Cross Road 1		1	150.00	6.00	0.04	36.00		
	Swagat Layout		1	50.00	6.00	0.04	12.00		
	5th Cross Road								
	4th Cross Road		1	230.00	4.50	0.04	41.40		
	Cross Road		1	209.00	4.50	0.04	37.62		
	Akashavani Layout		1	25.00	4.00	0.04	4.00		
	3rd Cross Road								
	2nd Cross Road(L-shape)		1	194.00	4.50	0.04	34.92		
	1st Cross Road		1	140.00	4.50	0.04	25.20		
	Venugopal Layout		1	115.00	4.50	0.04	20.70		
	5th Cross Road								
	4th Cross Road		1	93.00	6.00	0.04	22.32		
	3rd Cross Road		1	72.00	6.00	0.04	17.28		
	Main Road		1	136.00	5.00	0.04	27.20		
	4th Phase yelahanka		1	320.00	6.50	0.04	83.20		
	2nd Main Road Near Kitchen 6								
	Cross Road		1	420.20	8.20	0.04	137.83		
	2nd Main 2nd Cross Road CHS 707		1	118.00	6.50	0.04	30.68		
	2nd Main Road		1	232.80	4.50	0.04	41.90		
			1	250.00	4.50	0.04	45.00		
	2nd Main Road		1	75.00	7.00	0.04	21.00		
	5th Cross Left Side		1	44.00	3.00	0.04	5.28		
	1st Main Road		1	93.00	3.00	0.04	11.16		
	5th Cross Road		1	224.70	4.00	0.04	35.95		
	4th Main Road CHS 707		1	340.00	5.00	0.04	68.00		
	4th Main Left Side		1	382.00	6.00	0.04	91.68		
	Durgamba Temple Parallel Road		1	81.40	4.10	0.04	13.35		
	3rd Main Road 6th Cross Road CHS 707		1	35.30	4.00	0.04	5.65		
	3rd Main Cross Road		1	296.70	4.10	0.04	48.66		
	3rd Main 1st Cross		1	91.60	2.54	0.04	9.31		
	Baghyalaxmi Bar Road		1	100.00	3.00	0.04	12.00		
			1	308.00	7.00	0.04	86.24		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	3rd Main 5th Cross Road								
	2nd Main 3rd Cross		1	91.80	3.50	0.04	12.85		
	Kapila Layout Road		1	310.00	3.50	0.04	43.40		
			1	92.00	4.80	0.04	17.66		
	Approved rate	**9134.39**					**2425.46**	**9134.39**	**22155104.88**
14	Providing and Constructing dry lean cement concrete mix CC1:5:10 base with OPC 25mm and down size graded granite metal coarse aggregates at 0.86cum and fine aggregates @0.58cum over a prepared sub-base, coarse and fine aggregatesconforming to IS: 383-2016, aggregates gradation after blending to be as per table 600-1 optimum moisture content to be determined during trial length construction concrete strength not to be less tham 10Mpa at 7 days mixed in a batch mixer plant transportated to site, laid with a paver, compacting with 8-10 tonnes vibratory roller								
	4th Phase Yelahanka								
	Infront of Arkavathi Block -S HIG-B5		1.00	14.00	3.20	0.15	6.72		
			1.00	30.00	2.90	0.15	13.05		
			1.00	30.00	2.90	0.15	13.05		
			1.00	7.00	2.90	0.15	3.05		
	AMS Layout								
	Cross Road								
			1.00	30.00	6.70	0.15	30.15		
			1.00	30.00	6.70	0.15	30.15		
			1.00	9.50	6.70	0.15	9.55		
	Approved rate	**3990.10**					**105.71**	**3990.10**	**421803.45**
15	Constructing Un-reinforced plain cement concrete for pavements using grade concrete M30 over a prepared base with OPC coarse aggregates at 0.69Cum fine aggregates at 0.46cum coarse and fine aggregates conforming to IS: 383-2016, with superplastisizer at 3 its conforming to IS: 9103-2008 mixed in a concrete mixer of not less than 0.6cum capacity and appropriate weight batcher as per approved mix design laid in approved fixed side form work and spreading the concrete with shovels, rackers compacted using needles screed and plate vibrator and finished with floaters in a contineous operation including provision of contraction and cover the surface by gunny bags for curing.								
	4th Phase Yelahanka								
	Infront of Arkavathi Block -S HIG-B5		1.00	14.00	3.20	0.20	8.96		
			1.00	30.00	2.90	0.20	17.40		
			1.00	30.00	2.90	0.20	17.40		
			1.00	7.00	2.90	0.20	4.06		
	AMS Layout								
	Cross Road								
			1.00	30.00	6.70	0.20	40.20		
			1.00	30.00	6.70	0.20	40.20		
			1.00	9.50	6.70	0.20	12.73		
	Approved rate	**5471.51**					**140.95**	**5471.51**	**771209.33**
16	KSRRB M800-35. Supply and installation of molded shank raised pavment markers made up of poly carbonate and ABS (acrylonitrile Butadiene styrene) molded body and reflective pannels with microprismatic lens capable of providing total internal reflection of the light entering the lense face and shall support load of 16000 KG tested in accordance to specifications of catagory A of MORTH circular No. RW/NH/33023/10-97 - DO III Dt 11.06.1997. the height width and length shall not exceed 50mm, 100mm and 102mm and with minimum reflective area of 13Sqcm on each side and the slope to the base shall be 35o the strength of detachment of the intergated cylindrical shanks (of diameter not less than 19mm and height not less than 30mm) from the body is to be a minimum value of 500KG. fixing will be by drilling hole on the road for the shanks to go inside, with out nails and using Epoxy resin based adhesive as per manufacuter recommendations and complete as directed by the engineer KPWD S.R 2018-19 It No. 24.41 Pg No. 187								
	For 7M interval	**No's**							

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Ams Extension								
	3rd Main Road		2.0	29			59		
	4th A Main road		2.0	23			46		
	4th Main Road		2.0	23			46		
	7th A Cross Road		2.0	14			29		
	5th A Main Road		2.0	22			44		
	6th A Main Road		2.0	21			41		
	oriental school road		2.0	31			62		
	1st main AMS Extension		2.0	26			51		
	opposite to regancy school gate 2		2.0	14			27		
	Beside Arohana Stationary		2.0	14			29		
	Main Road 3rd		2.0	48			95		
	Ams Layout								
	4th B Main Road		2.0	22			45		
	4th A Main Road		2.0	23			46		
	4th C Main Road		2.0	44			89		
	3rd Main Road		2.0	34			68		
	1st Cross Road AMS Extension		2.0	5			10		
	2nd Cross Road AMS Extension		2.0	12			23		
	3rd Cross Road AMS Extension		2.0	12			23		
	2nd Main Road		2.0	29			57		
	3rd Cross Road		2.0	49			97		
	2nd Cross Road		2.0	35			69		
	1st Cross Road		2.0	34			69		
	4th Cross Road		2.0	40			80		
	5th Cross Road		2.0	41			83		
	6th Cross Road		2.0	15			30		
	7th Cross Road		2.0	8			16		
	7th Main Road		2.0	43			86		
	1st 'A' Main Road AMS Layout		2.0	8			16		
	1st Main Road AMS Layout		2.0	21			43		
	Cross Road-3		2.0	21			43		
	Cross Road 1		2.0	7			14		
	Swagat Layout								
	5th Cross Road		2.0	33			66		
	4th Cross Road		2.0	30			60		
	Cross Road		2.0	4			7		
	Akashavani Layout								
	3rd Cross Road		2.0	28			55		
	2nd Cross Road(L-shape)		2.0	20			40		
	1st Cross Road		2.0	16			33		
	Venugopal Layout								
	5th Cross Road		2.0	13			27		
	4th Cross Road		2.0	10			21		
	3rd Cross Road		2.0	19			39		
	Main Road		2.0	46			91		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		2.0	60			120		
	Cross Road		2.0	17			34		
	2nd Main 2nd Cross Road CHS 707		2.0	33			67		
	2nd Main Road		2.0	46			93		
	2nd Main Road		2.0	6			13		
	5th Cross Left Side		2.0	13			27		
	1st Main Road		2.0	32			64		
	5th Cross Road		2.0	49			97		
	4th Main Road CHS 707		2.0	55			109		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	4th Main Left Side		2.0	12			23		
	Durgamba Temple Parallel Road		2.0	5			10		
	3rd Main Road 6th Cross Road CHS 707		2.0	42			85		
	3rd Main Cross Road		2.0	13			26		
	3rd Main 1st Cross		2.0	14			29		
	Baghyalaxmi Bar Road		2.0	44			88		
	3rd Main 5th Cross Road		2.0	13			26		
	2nd Main 3rd Cross		2.0	44			89		
	Kapila Layout Road		2.0	13			26		
							2999	**375.08**	**1124757.75**
	Approved rate	**375.08**							
17	KSRRB M800-13. Road marking with hot applied thermoplastic compound with reflectrising glass beads on bituminous surface / concrete surface : providing and laying of hot applied thermo plastic compound 2.5mm thick including reflectorising glass beads at 250gms per sqm area thickness of 2.5mm is exclusive of surface applied glass beads as per IRC:35 standards specified.complete as per specifications.								
	Centre Line	**Sqm**							
	Ams Extension								
	3rd Main Road		0.5	205.00	0.10		10.25		
	4th A Main road		0.5	160.00	0.10		8.00		
	4th Main Road		0.5	162.00	0.10		8.10		
	7th A Cross Road		0.5	101.00	0.10		5.05		
	5th A Main Road		0.5	153.00	0.10		7.65		
	6th A Main Road		0.5	144.00	0.10		7.20		
	oriental school road		0.5	216.50	0.10		10.83		
	1st main AMS Extension		0.5	180.00	0.10		9.00		
	opposite to regancy school gate 2		0.5	96.00	0.10		4.80		
	Beside Arohana Stationary		0.5	100.00	0.10		5.00		
	Main Road 3rd		0.5	333.00	0.10		16.65		
	Ams Layout								
	4th B Main Road		0.5	156.00	0.10		7.80		
	4th A Main Road		0.5	162.00	0.10		8.10		
	4th C Main Road		0.5	310.00	0.10		15.50		
	3rd Main Road		0.5	238.00	0.10		11.90		
	1st Cross Road AMS Extension		0.5	33.40	0.10		1.67		
	2nd Cross Road AMS Extension		0.5	82.00	0.10		4.10		
	3rd Cross Road AMS Extension		0.5	82.20	0.10		4.11		
	2nd Main Road		0.5	200.00	0.10		10.00		
	3rd Cross Road		0.5	340.00	0.10		17.00		
	2nd Cross Road		0.5	242.00	0.10		12.10		
	1st Cross Road		0.5	240.00	0.10		12.00		
	4th Cross Road		0.5	280.00	0.10		14.00		
	5th Cross Road		0.5	290.00	0.10		14.50		
	6th Cross Road		0.5	103.50	0.10		5.18		
	7th Cross Road		0.5	57.00	0.10		2.85		
	7th Main Road		0.5	300.00	0.10		15.00		
	1st 'A' Main Road AMS Layout		0.5	56.40	0.10		2.82		
	1st Main Road AMS Layout		0.5	150.00	0.10		7.50		
	Cross Road-3		0.5	150.00	0.10		7.50		
	Cross Road 1		0.5	50.00	0.10		2.50		
	Swagat Layout								
	5th Cross Road		0.5	230.00	0.10		11.50		
	4th Cross Road		0.5	209.00	0.10		10.45		
	Cross Road		0.5	25.00	0.10		1.25		
	Akashavani Layout								
	3rd Cross Road		0.5	194.00	0.10		9.70		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	2nd Cross Road(L-shape)		0.5	140.00	0.10		7.00		
	1st Cross Road		0.5	115.00	0.10		5.75		
	Venugopal Layout								
	5th Cross Road		0.5	93.00	0.10		4.65		
	4th Cross Road		0.5	72.00	0.10		3.60		
	3rd Cross Road		0.5	136.00	0.10		6.80		
	Main Road		0.5	320.00	0.10		16.00		
	4th Phase yelahanka								
	2nd Main Road Near Kitchen 6		0.5	420.20	0.10		21.01		
	Cross Road		0.5	118.00	0.10		5.90		
	2nd Main 2nd Cross Road CHS 707		0.5	232.80	0.10		11.64		
	2nd Main Road		0.5	250.00	0.10		12.50		
			0.5	75.00	0.10		3.75		
	2nd Main Road		0.5	44.00	0.10		2.20		
	5th Cross Left Side		0.5	93.00	0.10		4.65		
	1st Main Road		0.5	224.70	0.10		11.24		
	5th Cross Road		0.5	340.00	0.10		17.00		
	4th Main Road CHS 707		0.5	382.00	0.10		19.10		
	4th Main Left Side		0.5	81.40	0.10		4.07		
	Durgamba Temple Parallel Road		0.5	35.30	0.10		1.77		
	3rd Main Road 6th Cross Road CHS 707		0.5	296.70	0.10		14.84		
	3rd Main Cross Road		0.5	91.60	0.10		4.58		
	3rd Main 1st Cross		0.5	100.00	0.10		5.00		
	Baghyalaxmi Bar Road		0.5	308.00	0.10		15.40		
	3rd Main 5th Cross Road		0.5	91.80	0.10		4.59		
	2nd Main 3rd Cross		0.5	310.00	0.10		15.50		
	Kapila Layout Road		0.5	92.00	0.10		4.60		
	Edge Lane								
	Ams Extension								
	3rd Main Road		2	205.00	0.15		61.50		
	4th A Main road		2	160.00	0.15		48.00		
	4th Main Road		2	162.00	0.15		48.60		
	7th A Cross Road		2	101.00	0.15		30.30		
	5th A Main Road		2	153.00	0.15		45.90		
	6th A Main Road		2	144.00	0.15		43.20		
	oriental school road		2	216.50	0.15		64.95		
	1st main AMS Extension		2	180.00	0.15		54.00		
	opposite to regancy school gate 2		2	96.00	0.15		28.80		
	Beside Arohana Stationary		2	100.00	0.15		30.00		
	Main Road 3rd		2	333.00	0.15		99.90		
	Ams Layout								
	4th B Main Road		2	156.00	0.15		46.80		
	4th A Main Road		2	162.00	0.15		48.60		
	4th C Main Road		2	310.00	0.15		93.00		
	3rd Main Road		2	238.00	0.15		71.40		
	1st Cross Road AMS Extension		2	33.40	0.15		10.02		
	2nd Cross Road AMS Extension		2	82.00	0.15		24.60		
	3rd Cross Road AMS Extension		2	82.20	0.15		24.66		
	2nd Main Road		2	200.00	0.15		60.00		
	3rd Cross Road		2	340.00	0.15		102.00		
	2nd Cross Road		2	242.00	0.15		72.60		
	1st Cross Road		2	240.00	0.15		72.00		
	4th Cross Road		2	280.00	0.15		84.00		
	5th Cross Road		2	290.00	0.15		87.00		
	6th Cross Road		2	103.50	0.15		31.05		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	7th Cross Road								
	7th Main Road		2	57.00	0.15		17.10		
	1st 'A' Main Road AMS Layout		2	300.00	0.15		90.00		
	1st Main Road AMS Layout		2	56.40	0.15		16.92		
	Cross Road-3		2	150.00	0.15		45.00		
	Cross Road 1		2	150.00	0.15		45.00		
	Swagat Layout		2	50.00	0.15		15.00		
	5th Cross Road								
	4th Cross Road		2	230.00	0.15		69.00		
	Cross Road		2	209.00	0.15		62.70		
	Akashavani Layout		2	25.00	0.15		7.50		
	3rd Cross Road								
	2nd Cross Road(L-shape)		2	194.00	0.15		58.20		
	1st Cross Road		2	140.00	0.15		42.00		
	Venugopal Layout		2	115.00	0.15		34.50		
	5th Cross Road								
	4th Cross Road		2	93.00	0.15		27.90		
	3rd Cross Road		2	72.00	0.15		21.60		
	Main Road		2	136.00	0.15		40.80		
	4th Phase yelahanka		2	320.00	0.15		96.00		
	2nd Main Road Near Kitchen 6								
	Cross Road		2	420.20	0.15		126.06		
	2nd Main 2nd Cross Road CHS 707		2	118.00	0.15		35.40		
	2nd Main Road		2	232.80	0.15		69.84		
			2	250.00	0.15		75.00		
	2nd Main Road		2	75.00	0.15		22.50		
	5th Cross Left Side		2	44.00	0.15		13.20		
	1st Main Road		2	93.00	0.15		27.90		
	5th Cross Road		2	224.70	0.15		67.41		
	4th Main Road CHS 707		2	340.00	0.15		102.00		
	4th Main Left Side		2	382.00	0.15		114.60		
	Durgamba Temple Parallel Road		2	81.40	0.15		24.42		
	3rd Main Road 6th Cross Road CHS 707		2	35.30	0.15		10.59		
	3rd Main Cross Road		2	296.70	0.15		89.01		
	3rd Main 1st Cross		2	91.60	0.15		27.48		
	Baghyalaxmi Bar Road		2	100.00	0.15		30.00		
	3rd Main 5th Cross Road		2	308.00	0.15		92.40		
	2nd Main 3rd Cross		2	91.80	0.15		27.54		
	Kapila Layout Road		2	310.00	0.15		93.00		
			2	92.00	0.15		27.60		
							3673.43	**477.48**	**1753986.97**
	Approved rate	**477.48**							
18	Providing and Laying plain/reinforced cemnt concrete for side drains using M20 nominal mix concrete with OPC at 300Kg with 20mm and down size granite metal coarse aggregates at 0.69cum and fine aggregates 0.43cum machie mixed well compacted for walls and bottom including centring shutterig cost of materials HOM of machinary curing etc., complete as per specification.								
	Kapila Block S-HISG-B3 Right side		2.00	5.60	0.11	0.10	0.12		
			2.00	18.90	0.11	0.10	0.42		
			2.00	7.20	0.11	0.10	0.16		
			2.00	2.20	0.11	0.10	0.05		
			2.00	4.00	0.11	0.10	0.09		
	Kapila Block S-HISG-B3 Back side		2.00	30.00	0.11	0.10	0.66		
			2.00	28.00	0.11	0.10	0.62		
	Kapila Block S-HISG-B3 Left side		2.00	9.00	0.11	0.10	0.20		
			2.00	12.00	0.11	0.10	0.26		
			2.00	9.00	0.11	0.10	0.20		
			2.00	3.10	0.11	0.10	0.07		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
			2.00	5.00	0.11	0.10	0.11		
			2.00	3.00	0.11	0.10	0.07		
	Yamuna S-HIG-A8 Surrounding		2.00	9.80	0.11	0.10	0.22		
			2.00	9.40	0.11	0.10	0.21		
			2.00	30.00	0.11	0.10	0.66		
			2.00	2.00	0.11	0.10	0.04		
			2.00	9.50	0.11	0.10	0.21		
			2.00	9.50	0.11	0.10	0.21		
			2.00	4.10	0.11	0.10	0.09		
			2.00	6.70	0.11	0.10	0.15		
			2.00	5.60	0.11	0.10	0.12		
			2.00	5.50	0.11	0.10	0.12		
			2.00	5.00	0.11	0.10	0.11		
			2.00	4.60	0.11	0.10	0.10		
	S-HIG-C-04 Flat No 49-64 Front side		2.00	7.00	0.11	0.10	0.15		
			2.00	8.70	0.11	0.10	0.19		
			2.00	9.20	0.11	0.10	0.20		
			2.00	12.20	0.11	0.10	0.27		
	S-HIG-C-04 Flat No 49-64 Back side		2.00	13.20	0.11	0.10	0.29		
			2.00	12.45	0.11	0.10	0.27		
			2.00	1.80	0.11	0.10	0.04		
	Deduction for chambers abd sump tank		2.00	0.50	0.11	0.10	0.01		
	Anurag Flat No 33-48 S-HIS-C-03 Front side		2.00	28.50	0.11	0.10	0.63		
			2.00	4.20	0.11	0.10	0.09		
			2.00	20.50	0.11	0.10	0.45		
			2.00	30.00	0.11	0.10	0.66		
			2.00	8.00	0.11	0.10	0.18		
			2.00	18.50	0.11	0.10	0.41		
	Sri Saptagiri S-HIG-C-07 Front side		2.00	30.00	0.11	0.10	0.66		
	Sri Saptagiri S-HIG-C-07 Right side		2.00	7.50	0.11	0.10	0.17		
	Sri Saptagiri S-HIG-C-07 Back side		2.00	29.00	0.11	0.10	0.64		
	Omsai S-HIG-C-8 Front side		2.00	25.00	0.11	0.10	0.55		
	Omsai S-HIG-C-8 Back side		2.00	24.00	0.11	0.10	0.53		
	Green View S-HIG-C-9 Front side		2.00	30.00	0.11	0.10	0.66		
			2.00	4.00	0.11	0.10	0.09		
	Green View S-HIG-C-9 left side		2.00	25.00	0.11	0.10	0.55		
	Swasthik S-HIG-C Right Side		2.00	12.00	0.11	0.10	0.26		
	Swasthik S-HIG-C Front Side		2.00	23.60	0.11	0.10	0.52		
	Square Yards S-HIG-01 Front Side		2.00	32.30	0.11	0.10	0.71		
	Square Yards S-HIG-01 Front Side		2.00	25.40	0.11	0.10	0.56		
	Omkar Appartment NHIG-C-6 (Front side)		2.00	28.00	0.11	0.10	0.62		
			2.00	9.00	0.11	0.10	0.20		
	Omkar Appartment NHIG-C-6 (Left side)		2.00	10.00	0.11	0.10	0.22		
			2.00	19.00	0.11	0.10	0.42		
	Omkar Appartment NHIG-C-6 (Right side)		2.00	16.00	0.11	0.10	0.35		
			2.00	13.50	0.11	0.10	0.30		
			2.00	9.00	0.11	0.10	0.20		
	Dhruva Appartments		2.00	14.00	0.11	0.10	0.31		
			2.00	3.00	0.11	0.10	0.07		
	Santa Shree Sevalal maharaj Park Front		2.00	9.00	0.11	0.10	0.20		
			2.00	9.00	0.11	0.10	0.20		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Santa Shree Sevalal maharaj Park Opposite		2.00	21.00	0.11	0.10	0.46		
	Near Neha prakash Hospital Front side		2.00	12.50	0.11	0.10	0.28		
			2.00	30.00	0.11	0.10	0.66		
			2.00	6.00	0.11	0.10	0.13		
			2.00	30.00	0.11	0.10	0.66		
	Veersagar Main Road Government hospital		2.00	24.50	0.11	0.10	0.54		
			2.00	9.50	0.11	0.10	0.21		
			2.00	9.50	0.11	0.10	0.21		
			2.00	19.20	0.11	0.10	0.42		
			2.00	19.20	0.11	0.10	0.42		
			2.00	19.20	0.11	0.10	0.42		
			2.00	14.00	0.11	0.10	0.31		
			2.00	7.00	0.11	0.10	0.15		
	Deduction Chambers and sump tanks		4.00	5.00	0.11	0.10	-0.22		
			6.00	1.00	0.11	0.10	-0.07		
	Shivakumar mahaswami Sabangana Front portion		2.00	35.00	0.11	0.10	0.77		
	Deduction Chambers and sump tanks		3.00	1.20	0.11	0.10	-0.04		
	Left side		2.00	13.00	0.11	0.10	0.29		
			2.00	4.40	0.11	0.10	0.10		
	Right side side		2.00	13.00	0.11	0.10	0.29		
	deduction for benches		8.00	1.20	0.11	0.10	-0.11		
	New Drain								
	Raft								
	Cross Road		1.00	250.00	0.90	0.15	33.75		
	Wall								
	Cross Road		2.00	250.00	0.15	0.60	45.00		
	AMS Extension Layout Culverts								
	Raft								
	3rd Main Road		1.00	7.50	1.50	0.23	2.59		
	4th Main Road		1.00	7.90	1.50	0.23	2.73		
	4th 'A'Main Road		1.00	7.40	1.50	0.23	2.55		
	5th Main Road		1.00	6.50	1.50	0.23	2.24		
	6th Main Road		1.00	6.20	1.50	0.23	2.14		
	Wall								
	3rd Main Road		2.00	7.50	0.20	0.90	2.70		
	4th Main Road		2.00	7.90	0.20	0.90	2.84		
	4th 'A'Main Road		2.00	7.40	0.20	0.90	2.66		
	5th Main Road		2.00	6.50	0.20	0.90	2.34		
	6th Main Road		2.00	6.20	0.20	0.90	2.23		
	Drain Raising								
	9th Main Attur Layout	2	2.00	360.00	0.20	0.15	43.20		
	Culvert Raising								
	9th Main Road Attur Layout								
	RHS								
	1st Cross Road		2.00	6.80	0.20	0.20	0.54		
	2nd Cross Road		2.00	6.50	0.20	0.20	0.52		
	3rd Cross Road		2.00	6.50	0.20	0.20	0.52		
	4th Cross Road		2.00	6.20	0.20	0.20	0.50		
	LHS								
	1st Cross Road		2.00	5.90	0.20	0.20	0.47		
	2nd Cross Road		2.00	6.20	0.20	0.20	0.50		
	3rd Cross Road		2.00	6.50	0.20	0.20	0.52		
	4th Cross Road		2.00	6.50	0.20	0.20	0.52		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
							175.00	7423.71	1299184.88
	Approved rate	7423.71							
19	KSRRB M100-1 Loading and unloading of stone boulder I stone aggregates IS and/ Kankar J Moorum. KSRRB M100-1: Placing tipper at loading point, loading with front end loader, dumping, turning for return trip Excluding time for haulage and return trip complete as per specfication. MORTH-100/Chapter 1.								
							0	63.44	0
	Approved rate	63.44							
20	KSRRB M100-4.1. Cost of haulage excluding loading and unloading MORTH-100/Chapter 1 Case 1: Surface road								
							0.00	2.23	0
	Approved rate	2.23							
21	KSRRB M2900-1. Plain cement concrete M10 mix with crushed stone aggregates 40mm nominal size mechanically mixed, placed in foundation and compacted by vibration including curing including cost of materials, labour,HOM completed as per specifications								
	New Drain								
	Cross Road		1.00	250.00	1.00	0.15	37.50		
	AMS Extension Layout								
	3rd Main Road		1.00	7.50	1.50	1.00	11.25		
	4th Main Road		1.00	7.90	1.50	1.00	11.85		
	4th 'A'Main Road		1.00	7.40	1.50	1.00	11.10		
	5th Main Road		1.00	6.50	1.50	1.00	9.75		
	6th Main Road		1.00	6.20	1.50	1.00	9.30		
	New Kerbs								
	Yelahanka 4th Phase								
	2nd Cross Road		1.00	157.80	0.20	0.10	3.16		
	4th Main Road		1.00	614.40	0.20	0.10	12.29		
	5th Cross Road		1.00	648.10	0.20	0.10	12.96		
	1st Main Road		1.00	497.20	0.20	0.10	9.94		
							129.10	**4703.54**	**607227.01**
	Approved rate	**4703.54**							
22	KSRB 14.6-1 : Providing and laying heavy duty cobble stones 60mm thick interlock pavers, using cement and course sand for manufacture of blocks od approved size, shape and colour with a minimum compressive strength of 281kg per sqm over 50mm thick sand bed (average thickness) and compacting with plate vibrator having 3 tons compaction force thereby forcing part of sand underneath to come up in between joints, final compaction of paver surface joints, final compaction of paver surface joints into its final level, including cost of materials, labour and HOM of machineries complete as per specification.								
	Kapila Block S-HISG-B3 Right side			5.60	3.10		17.36		
				18.90	14.10		266.49		
				7.20	14.20		102.24		
				2.20	4.40		9.68		
				4.00	1.95		7.80		
	Kapila Block S-HISG-B3 Back side			30.00	5.90		177.00		
				28.00	5.90		165.20		
	Kapila Block S-HISG-B3 Left side			9.00	5.00		45.00		
				12.00	1.30		15.60		
				9.00	2.40		21.60		
				3.10	2.50		7.75		
				5.00	1.00		5.00		
				3.00	2.00		6.00		
	Yamuna S-HIG-A8 Surrounding			9.80	6.60		64.68		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				9.40	1.00		9.40		
				30.00	7.50		225.00		
				2.00	7.50		15.00		
				9.50	1.60		15.20		
				9.50	4.50		42.75		
				4.10	2.60		10.66		
				6.70	2.10		14.07		
				5.60	5.00		28.00		
				5.50	1.80		9.90		
				5.00	2.30		11.50		
				4.60	4.00		18.40		
	S-HIG-C-04 Flat No 49-64 Front side			7.00	5.30		37.10		
				8.70	3.00		26.10		
				9.20	4.90		45.08		
				12.20	5.40		65.88		
	S-HIG-C-04 Flat No 49-64 Back side			13.20	6.00		79.20		
				12.45	5.00		62.25		
				1.80	5.00		9.00		
	Deduction for chambers abd sump tank		4.00	0.50	0.50		0.25		
	Anurag Flat No 33-48 S-HIS-C-03 Front side			28.50	5.90		168.15		
				4.20	2.50		10.50		
				20.50	4.00		82.00		
				30.00	4.30		129.00		
				8.00	4.00		32.00		
				18.50	8.30		153.55		
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50		165.00		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00		45.00		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40		214.60		
	Omsai S-HIG-C-8 Front side			25.00	6.50		162.50		
	Omsai S-HIG-C-8 Back side			24.00	8.40		201.60		
	Green View S-HIG-C-9 Front side			30.00	6.90		207.00		
				4.00	6.90		27.60		
	Green View S-HIG-C-9 left side			25.00	11.00		275.00		
	Swasthik S-HIG-C Right Side			12.00	5.70		68.40		
	Swasthik S-HIG-C Front Side			23.60	7.20		169.92		
	Square Yards S-HIG-01 Front Side			32.30	6.80		219.64		
	Square Yards S-HIG-01 Front Side			25.40	8.80		223.52		
	Omkar Appartment NHIG-C-6 (Front side)			28.00	2.30		64.40		
				9.00	3.30		29.70		
	Omkar Appartment NHIG-C-6 (Left side)			10.00	4.80		48.00		
				19.00	2.60		49.40		
	Omkar Appartment NHIG-C-6 (Right side)			16.00	7.30		116.80		
				13.50	3.70		49.95		
				9.00	3.30		29.70		
	Dhruva Appartments			14.00	10.00		140.00		
				3.00	2.00		6.00		
	Santa Shree Sevalal maharaj Park Front			9.00	6.90		62.10		
				9.00	3.60		32.40		
	Santa Shree Sevalal maharaj Park Opposite			21.00	5.00		105.00		
				12.50	2.70		33.75		
	Near Neha prakash Hospital Front side			30.00	5.00		150.00		
				6.00	5.00		30.00		
				30.00	5.00		150.00		
				24.50	5.00		122.50		
	Veersagar Main Road Government hospital			9.50	1.50		14.25		
				9.50	1.50		14.25		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
				19.20	1.50		28.80		
				19.20	1.50		28.80		
				19.20	1.50		28.80		
				14.00	1.50		21.00		
				7.00	1.50		10.50		
	Deduction Chambers and sump tanks		4.00	5.00	3.50		-70.00		
			6.00	1.00	1.00		-6.00		
	Shivakumar mahaswami Sabangana Front portion		1.00	37.70	43.00		1621.10		
	Deduction Chambers and sump tanks		3.00	1.20	1.80		-6.48		
	Left side			13.00	38.60		501.80		
				4.40	2.80		12.32		
	Left side			13.00	38.60		501.80		
	deduction for benches		8.00	1.20	2.00		-19.20		
							8092.56	**1171.99**	**9484399.39**
	Approved rate	**1171.99**							
23	Dismantelling/ removing and resetting of footpath slabs								
	Desilting								
	Venugopal Layout								
	Main Road	60%	2.00	320.00	1.20		460.80		
	4th Cross Road	65%	2.00	71.00	1.20		110.76		
	3rd Cross Road	65%	2.00	300.00	1.20		468.00		
	Akashawani layout								
	1st Cross Road	70%	2.00	115.00	1.20		193.20		
	3rd Cross Road	70%	2.00	150.00	1.20		252.00		
	AMS Layout								
	7th Cross Road	80%	2.00	310.00	1.20		595.20		
	7th A Cross Road	60%	2.00	101.00	1.20		145.44		
	5th A Main Road	60%	2.00	153.00	1.20		220.32		
	6th A Main Road	75%	2.00	144.00	1.20		259.20		
	opposite to regancy school gate 2	69%	2.00	96.00	1.20		158.98		
	1st Main Road	75%	2.00	169.00	1.20		304.20		
	4th 'A' Main Road	80%	2.00	150.00	1.20		288.00		
	Cross Road-3	80%	2.00	150.00	1.20		288.00		
	Yelahanka 4th Phase								
	5th Cross Road	75%	2.00	247.00	1.20		444.60		
	Bhagyalaxmi Bar Road	70%	2.00	300.00	1.20		504.00		
	2nd Main 3rd Cross	75%	2.00	310.00	1.20		558.00		
							5250.70	**219.26**	**1151267.60**
	Approved rate	**219.26**							
24	KSRRB300-1. Earthwork excavation by manual means for Drains and similar works in ordinar soil excavated surface levelled and sides neatly dressed, the dispossed earth to be levelled neatly after breaking of clods completed as per specifications. KPWD S.R 2018-19.								
	New Drain								
	Cross Road		1.00	250.00	1.00	1.10	275.00		
	Desilting								
	Venugopal Layout								
	Main Road		2.00	320.00	0.60	0.35	134.40		
	4th Cross Road		2.00	71.00	0.60	0.35	29.82		
	3rd Cross Road		2.00	300.00	0.60	0.35	126.00		
	Akashawani layout								
	1st Cross Road		2.00	115.00	0.60	0.35	48.30		
	3rd Cross Road		2.00	150.00	0.60	0.35	63.00		
	AMS Layout								
	7th Cross Road		2.00	310.00	0.60	0.35	130.20		
	7th A Cross Road		2.00	101.00	0.60	0.35	42.42		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	5th A Main Road		2.00	153.00	0.60	0.35	64.26		
	6th A Main Road		2.00	144.00	0.60	0.35	60.48		
	opposite to regancy school gate 2		2.00	96.00	0.60	0.35	40.32		
	Bhagya laxmi Bar road		2.00	350.00	0.60	0.35	147.00		
	9th Main Attur Layout		2.00	360.00	0.60	0.35	151.20		
	9th Main Road Attur Layout Culverts								
	RHS								
	1st Cross Road		1.00	6.80	0.90	0.35	2.14		
	2nd Cross Road		1.00	6.50	0.90	0.35	2.05		
	3rd Cross Road		1.00	6.50	0.90	0.35	2.05		
	4th Cross Road		1.00	6.20	0.90	0.35	1.95		
	LHS								
	1st Cross Road		1.00	5.90	0.90	0.35	1.86		
	2nd Cross Road		1.00	6.20	0.90	0.35	1.95		
	3rd Cross Road		1.00	6.50	0.90	0.35	2.05		
	4th Cross Road		1.00	6.50	0.90	0.35	2.05		
	New Culvert								
	AMS Extension Layout								
	3rd Main Road		1.00	7.50	1.50	1.00	11.25		
	4th Main Road		1.00	7.90	1.50	1.00	11.85		
	4th 'A'Main Road		1.00	7.40	1.50	1.00	11.10		
	5th Main Road		1.00	6.50	1.50	1.00	9.75		
	6th Main Road		1.00	6.20	1.50	1.00	9.30		
	New Kerbs								
	Yelahanka 4th Phase								
	2nd Cross Road		1.00	157.80	0.20	0.20	6.31		
	4th Main Road		1.00	614.40	0.20	0.20	24.58		
	5th Cross Road		1.00	648.10	0.20	0.20	25.92		
	1st Main Road		1.00	497.20	0.20	0.20	19.89		
							1458.45	**144.69**	**211022.62**
	Approved rate	**144.69**							
25	KSRRB M2200-6. Providing TMT Bars Fe 500 steel reinforcement for RCC work including Straightening, cutting, bending, hooking, placing in position, lapping and/or welding whereever required, tying with binding wire and anchoring to the adjoining members whereever necessary completed as per design ans specification.								
	For Drains						**4.05**		
	For Culverts	**Tonnes**					**1.40**		
							5.45	**75943.33**	**413709.47**
	Approved rate	**75943.33**							
26	providing and fixing precast reinforced concrete slab 10cm thick of mix M20 using 20mm and downsize graded granite metal using reinforcement 10mm dia steel at 150mm C/c both ways.								
	Damaged/ Missing Slabs								
	Venugopal Layout								
	Main Road		1.00	256.00	0.90		230.40		
	3rd Cross Road		1.00	182.00	0.90		163.80		
	AMS Layout								
	7th Cross Road		1.00	281.00	0.90		252.90		
	1st 'A' Main Road		1.00	114.00	0.90		102.60		
	Ams Extension Layout								
	5th Main Road		1.00	99.00	0.90		89.10		
	6th Main Road		1.00	102.20	0.90		91.98		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	1st Cross Road		1.00	81.80	0.90		73.62		
	3rd Cross Road		1.00	60.10	0.90		54.09		
	Cross Road		1.00	118.00	0.90		106.20		
	4th Phase Yelahanka								
	Bhagya Laxmi Bar Road		1.00	247.50	0.90		222.75		
	5th Main Road		1.00	177.90	0.90		160.11		
	4th Cross Road		1.00	244.10	0.90		219.69		
	5th Main Road		1.00	363.90	0.90		327.51		
	7th Main Road		1.00	202.00	0.90		181.80		
	9th Main Road Attue Layout		1.00	670.70	0.90		603.63		
							2943.78	**2453.85**	**7223594.55**
	Approved rate	**2453.85**							
27	Provoding and laying Precast Drain cover slabs of 250mm thick of mix M20 using graded granite jelly 20mm & downsize with steel reinforcement complete as per specification.								
	AMS Extension Layout								
	3rd Main Road		1.00	7.50	1.50		11.25		
	4th Main Road		1.00	7.90	1.50		11.85		
	4th 'A'Main Road		1.00	7.40	1.50		11.10		
	5th Main Road		1.00	6.50	1.50		9.75		
	6th Main Road		1.00	6.20	1.50		9.30		
	9th Main Road Attur Layout								
	RHS								
	1st Cross Road		1.00	6.80	1.50		10.20		
	2nd Cross Road		1.00	6.50	1.50		9.75		
	3rd Cross Road		1.00	6.50	1.50		9.75		
	4th Cross Road		1.00	6.20	1.50		9.30		
	LHS								
	1st Cross Road		1.00	5.90	1.50		8.85		
	2nd Cross Road		1.00	6.20	1.50		9.30		
	3rd Cross Road		1.00	6.50	1.50		9.75		
	4th Cross Road		1.00	6.50	1.50		9.75		
	Missing slabs								
			1.00	6.00	1.50		9.00		
			1.00	3.80	1.50		5.70		
			1.00	4.30	1.50		6.45		
			1.00	5.80	1.50		8.70		
			1.00	6.80	1.50		10.20		
			1.00	3.20	1.50		4.80		
			1.00	4.80	1.50		7.20		
			1.00	1.80	1.50		2.70		
			1.00	4.20	1.50		6.30		
			1.00	3.60	1.50		5.40		
							196.35	**5688.90**	**1117015.52**
	Approved rate	**5688.90**							
28	Providining & fixing precaste solid concrete kerb stones of size 450X200X400mm maid out of CC 1:2:4 and finished with CM 1:3 plastering and finishing cutting etc., complete.								
	New Kerbs								
	Yelahanka 4th Phase								
	2nd Cross Road		1.00	157.80			350.32		
	4th Main Road		1.00	614.40			1363.97		
	5th Cross Road		1.00	648.10			1438.78		
	1st Main Road		1.00	497.20			1103.78		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
							4256.85	454.10	1933035.59
	Approved rate	**454.10**							
29	KSRRB 800-1 Painting two coats after filling surface with synthetic enamel paint in approved shades on new plastered concrete surface with materials, labour complete as per specifications.								
	New Kerbs								
	Yelahanka 4th Phase								
	2nd Cross Road		1.00	157.80		0.45	71.01		
	4th Main Road		1.00	614.40		0.45	276.48		
	5th Cross Road		1.00	648.10		0.45	291.65		
	1st Main Road		1.00	497.20		0.45	223.74		
							862.88	**89.04**	**76830.39**
	Approved rate	**89.04**							
30	Removing and resetting of Stone slabs of draina and pointing in C:M 1:3								
	yelahanka 4th Phase								
	Bhagyalaxmi bar road		1.00	242.70	1.20		291.24		
							291.24	**110.25**	**32109.21**
	Approved rate	**110.25**							
31	KSRRB M200-15.1 Dismantelling of Existing Structures like culverts bridges retaining wall and other structures comprising of masonry cement concrete wood work Etc., Complete as per specifications.								
	AMS Extension Layout	**Cum**							
	3rd Main Road		1.00	7.50	0.40	1.00	3.00		
	4th Main Road		1.00	7.90	0.40	1.00	3.16		
	4th 'A'Main Road		1.00	7.40	0.40	1.00	2.96		
	5th Main Road		1.00	6.50	0.40	1.00	2.60		
	6th Main Road		1.00	6.20	0.40	1.00	2.48		
							14.20	**321.66**	**4567.57**
	Approved rate	**321.66**							
32	KSRRB M200-24 Dismatelling of cement concrete pavement by mechanical means using pneumatic tools breaking to pieces not exceeding 0.02 cum in volume and stock piling at designated locations and disposal of dismatelling materilas stackling servicable and unservicable materials seperately complete as per specification.								
	Sri Saptagiri S-HIG-C-07 Front side			30.00	5.50	0.15	24.75		
	Sri Saptagiri S-HIG-C-07 Right side			7.50	6.00	0.15	6.75		
	Sri Saptagiri S-HIG-C-07 Back side			29.00	7.40	0.15	32.19		
	Omsai S-HIG-C-8 Front side			25.00	6.50	0.15	24.38		
	Omsai S-HIG-C-8 Back side			24.00	8.40	0.15	30.24		
	Green View S-HIG-C-9 Front side			30.00	6.90	0.15	31.05		
				4.00	6.90	0.15	4.14		
	Green View S-HIG-C-9 left side			25.00	11.00	0.15	41.25		
	Swasthik S-HIG-C Right Side			12.00	5.70	0.15	10.26		
	Swasthik S-HIG-C Front Side			23.60	7.20	0.15	25.49		
	Omkar Appartment NHIG-C-6 (Front side)			28.00	2.30	0.15	9.66		
				9.00	3.30	0.15	4.46		
	Omkar Appartment NHIG-C-6 (Left side)			10.00	4.80	0.15	7.20		
				19.00	2.60	0.15	7.41		

No	Description of Items	Unit	No	Length	Width	Depth	Quantity	Rate	Amount
	Omkar Appartment NHIG-C-6 (Right side)			16.00	7.30	0.15	17.52		
	Dhruva Appartments			13.50	3.70	0.15	7.49		
				9.00	3.30	0.15	4.46		
	Santa Shree Sevalal maharaj Park Front			14.00	10.00	0.15	21.00		
				3.00	2.00	0.15	0.90		
				9.00	6.90	0.15	9.32		
	Santa Shree Sevalal maharaj Park Opposite			9.00	3.60	0.15	4.86		
				21.00	5.00	0.15	15.75		
	Near Neha prakash Hospital Front side			12.50	2.70	0.15	5.06		
				30.00	5.00	0.15	22.50		
				6.00	5.00	0.15	4.50		
	Veersagar Main Road Government hospital			30.00	5.00	0.15	22.50		
				9.50	1.50	0.15	2.14		
				9.50	1.50	0.15	2.14		
				19.20	1.50	0.15	4.32		
				19.20	1.50	0.15	4.32		
				19.20	1.50	0.15	4.32		
				14.00	1.50	0.15	3.15		
				7.00	1.50	0.15	1.58		
	Deduction Chambers and sump tanks		4.00	5.00	1.30	0.15	-3.90		
			6.00	1.00	1.00	0.15	-0.90		
							412.23	**1000.59**	**412476.22**
	Approved rate	**1000.59**							
								Modified Construction Cost	**123454871.52**
								Towards GST 12% of Modified Construction Cost	**14814584.58**
								Total	**138269456.10**
								Miscellaneous & Rounding Off	**131.90**
								Approved Amount	**138269588.00**

Assistant Engineer
Yelahanka New Town Sub Division
BBMP Bangalore

Asst Executive Engineer
Yelahanka New Town Sub Division
BBMP Bangalore

Executive Engineer
Yelahanka Division
BBMP Bangalore

Technical Sanction
Accorded For Rs.138269588.00
Head of A/C..
CER NO :..... Dt: 25.10.2021

Name of Work: Improvements to Roads and Drains and other developmental works in Attur Ward No-03 Under Road Development head in Chief Minister Navanagaraothana of Yelahanka Division (Package -02)

Contractor

Consultant

Assistant Engineer

Asst. Executive Engineer

...ne of Work: Improvements to Roads and Drains and other developmental works in Attur ...ard No-03 Under Road Development head in Chief Minister Navanagaraothana of Yelahanka Division (Package -02)

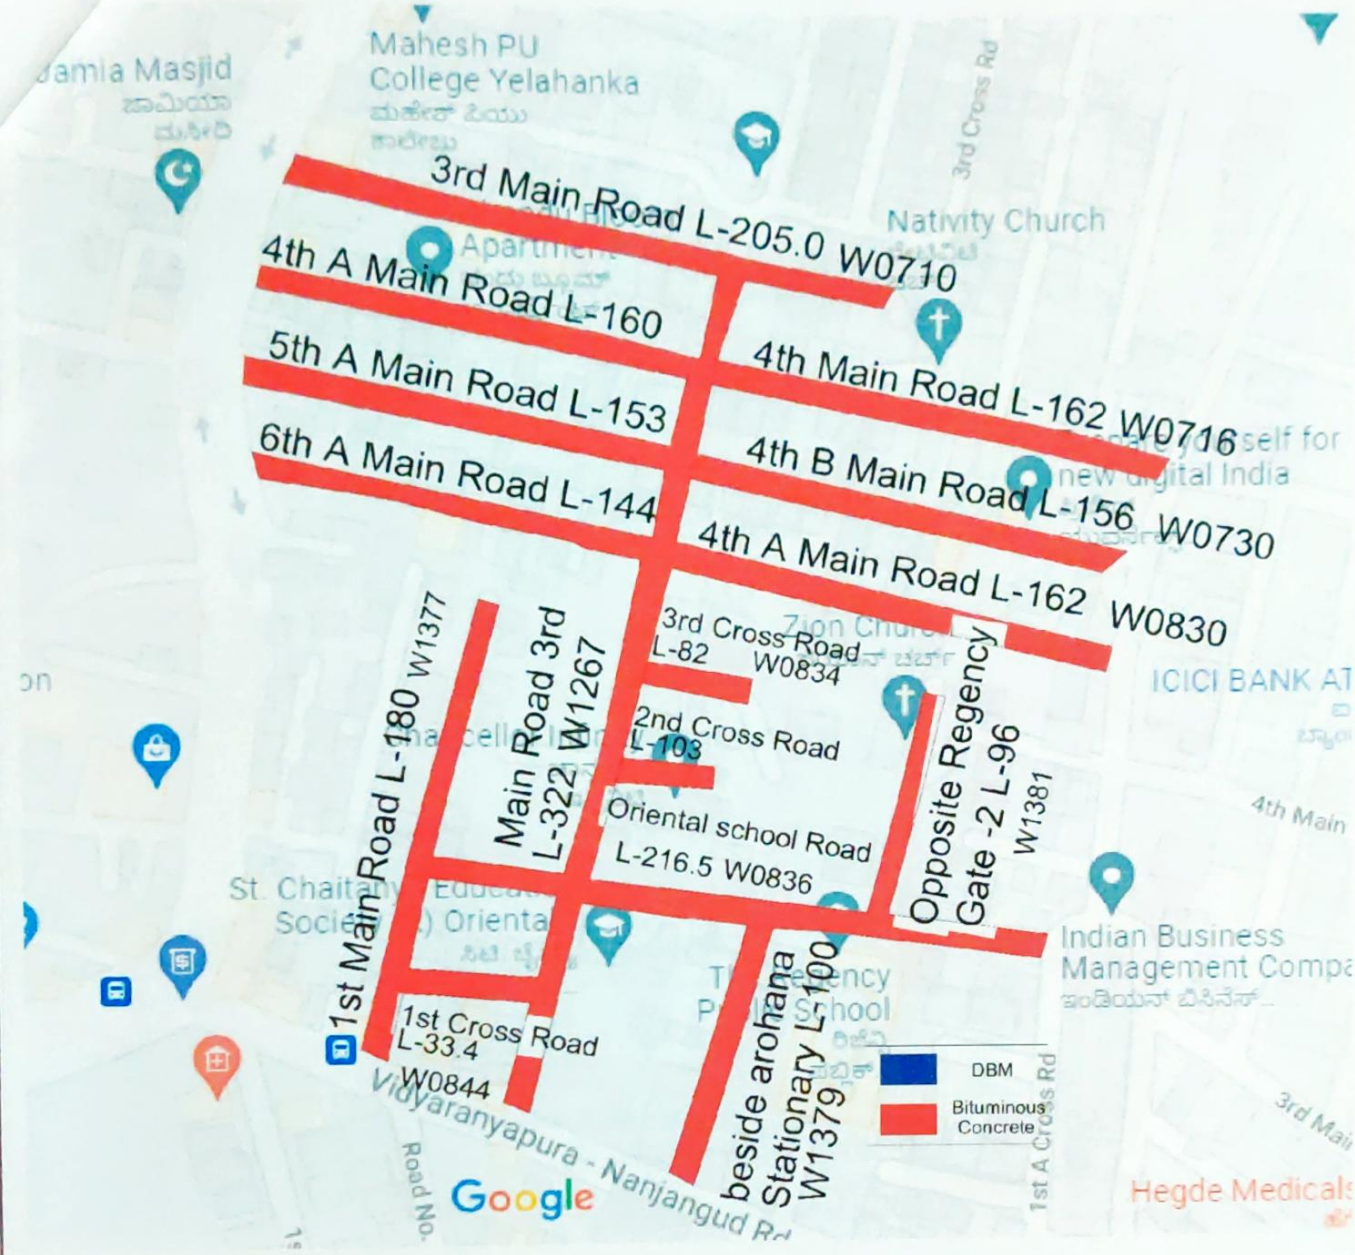

Contractor

Consultant

Assistant Engineer

Asst. Executive Engineer

...me of Work: Improvements to Roads and Drains and other developmental works in Attur ...Ward No-03 Under Road Development head in Chief Minister Navanagaraothana of Yelahanka ...Division (Package -02)

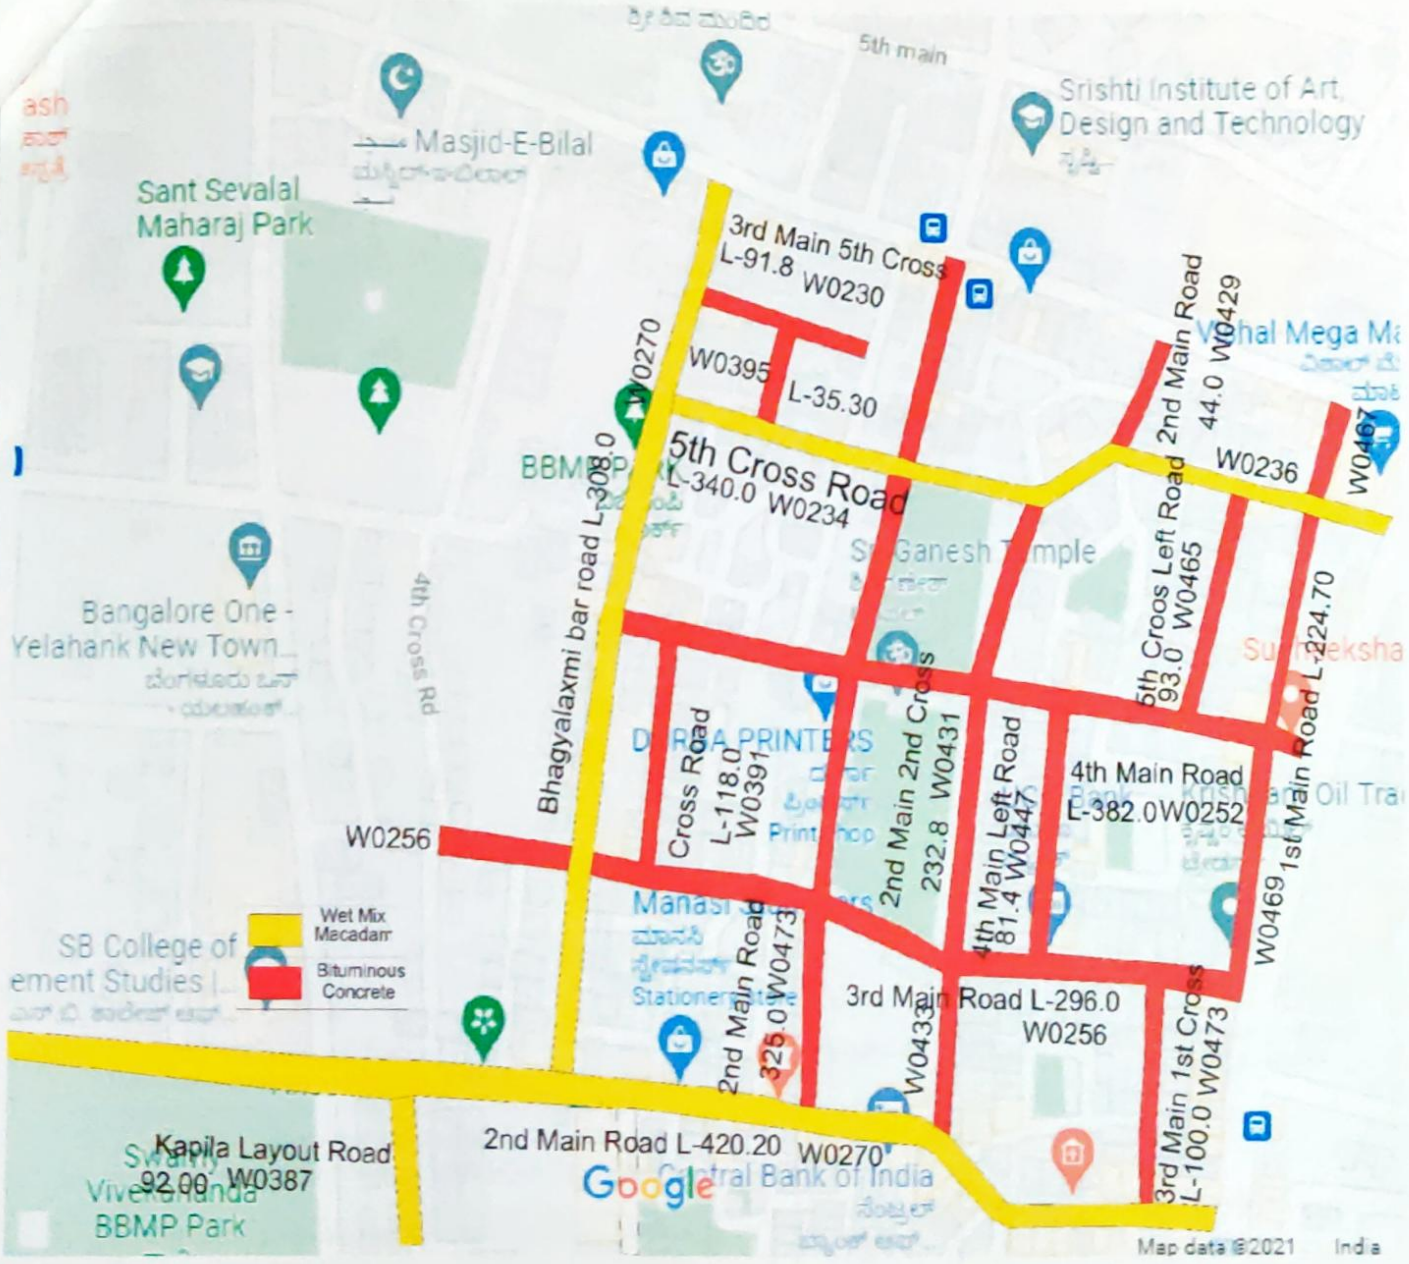

Contractor

Consultant

Assistant Engineer

...sst. Executive Engineer